1129 Medical Caster Series

Dersheng Casters Keep Rolling

W Resolute Wheel Diameter × Wheel Width 100 x 31mm

EAN

TW-4112904004044

Casters with Total Brakes and With locking system. Threaded Stem, Riveted Stamping Fork - 1/2-12 threads Zine-Plated, Mounting Type - Threaded Stem Reinforced, impact-resistant polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread Dark gray, Bearing - Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR) Wheel Center: high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 100mm Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Threaded Stem 1/2"-12牙 Threaded Size 32mm Offset 40mm **Swivel Interference** 212mm Overall Height 141mm **Swivel Radius** 106mm Hardness Of Tread

72±5° Shore A

Load Capacity (Dynamic) 125kgs Load Capacity (Static) 187.5kgs -20°C to +60°C Temperature

Fork Type Swivel Caster With Total Brake

N/A Stainless **Electrical Conductivity** N/A Anti-Static N/A Weight 0.65kgs Standard ISO22883


Advantages at a glance

Rolling Resistance


Operating Noise

Floor Surface Preservation • • • • •

Dimensions

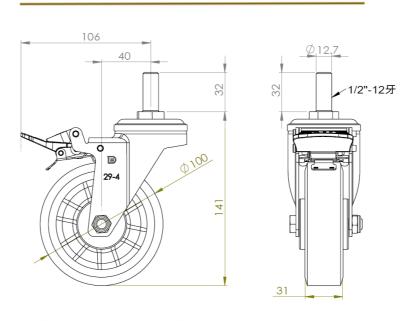

Mounting

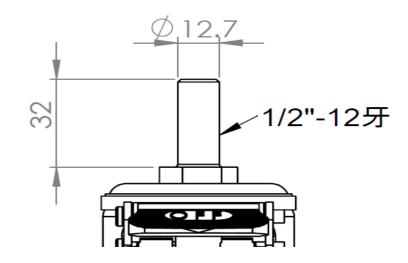

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.