# 1129 Medical Caster Series

Dersheng Casters Keep Rolling

W Resolute Wheel Diameter × Wheel Width 100 x 31mm


EAN

TW-4112904004046

Casters with Side Brakes and With locking system. Riveted Stamping Fork with 5/8-11 threads Zine-Plated, Mounting Type - Threaded Stem Reinforced impact-resistant polypropylene Wheel Center with High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread Dark gray, Bearing—Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)
Wheel Center: high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

#### Technical Data

#### ● Imperial ○ Metric

Wheel Diameter 4 "

Wheel Width 1-1/4 "

Wheel Bearing Wheels With Ball Bearings

Threaded Stem 5/8 " -11牙
Threaded Size 1-5/16 "
Offset 1-5/8 "
Swivel Interference 8-1/2 "
Overall Height 5-9/16 "
Swivel Radius 4-1/4 "

Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 276lbs

Load Capacity (Static) 413lbs

Temperature -4°F to +140°F

Fork Type Swivel Caster With Total Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.4lbs

Standard ISO22883


## Advantages at a glance

Rolling Resistance


Operating Noise • • • •

Floor Surface Preservation • • • • •

### Dimensions

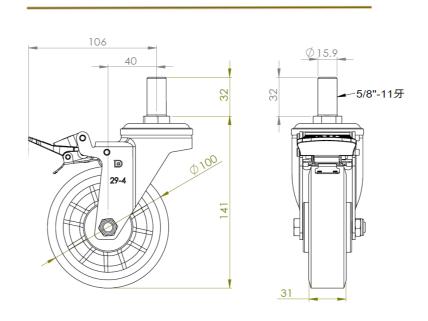

Mounting

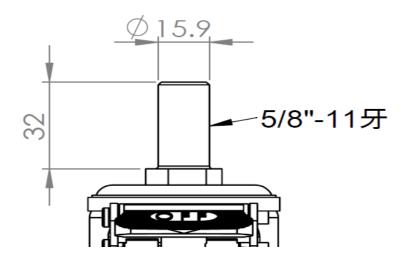

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.