1129 Medical Caster Series

Dersheng Casters Keep Rolling

PPR Wheel Diameter × Wheel Width 125 x 31mm

EAN


TW-4112905002018

Swivel Caster, Riveted Stamping Fork - 3/8-16 threads
Zine-Plated, Mounting Type - Threaded Stem
High-Quality Impact-Resistant Polypropylene core, High-Quality Reinforced Polypropylene
Rubber (TPR) Wheel Tread
Dark gray, Bearing - Ball Bearing

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 5 "

Wheel Width 1-1/4 "

Wheel Bearing Wheels With Ball Bearings

Threaded Stem 3/8 " -16牙
Threaded Size 1-5/16 "
Offset 1-1/2 "
Swivel Interference 8 "
Overall Height 6-9/16 "
Swivel Radius 4 "

Hardness Of Tread 82±5° Shore A
Load Capacity (Dynamic) 220lbs

Load Capacity (Static) 331lbs

Temperature -4°F to +140°F

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Electrical Conductivity

Anti-Static

N/A

Weight

1.4lbs

Standard

ISO22883


Advantages at a glance

Rolling Resistance


Operating Noise •

Floor Surface Preservation • • • • •

Dimensions

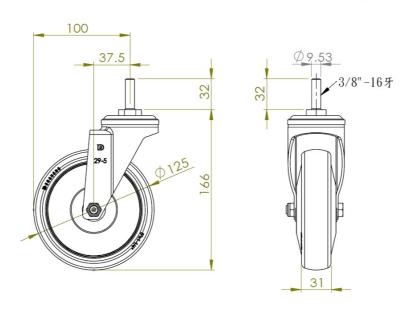

Mounting

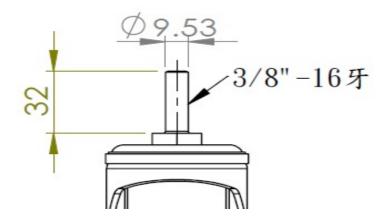

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.