1129 Medical Caster Series

Dersheng Casters Keep Rolling

PPR Wheel Diameter × Wheel Width 125 x 31mm

EAN

TW-4112905004004

Casters with Total Brakes and a With locking system. Premium Fork with Riveted Fork. Hole Zine-Plated, Top Plate (3T) Mounting Type system High-Quality Impact-Resistant Polypropylene Wheel Center with High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread Dark gray, Plain Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 5 "

Wheel Width 1-1/4 "

Wheel Bearing Wheel With Plain Bearing

Plate Size 3-7/8 " x 2-3/4 "

Bolt Hole Spacing 3 " x 1-13/16 "

Plate Hole 9/16 " x 23/64 "

Offset 1-1/2 "

Swivel Interference 8-1/2 "

Overall Height 6-1/2 "

Swivel Radius 4-1/4 "

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 220lbs

Load Capacity (Static) 331lbs

Temperature -4°F to +140°F

Fork Type Swivel Caster With Total Brake

ISO22883

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.9lbs

Standard


Advantages at a glance

Rolling Resistance •


Operating Noise • • • •

Floor Surface Preservation • • • • •

Dimensions

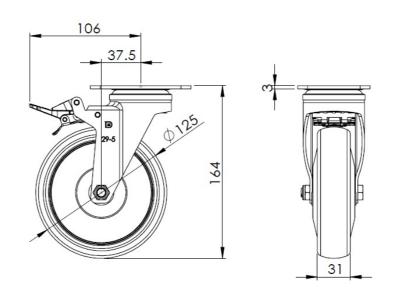

Mounting

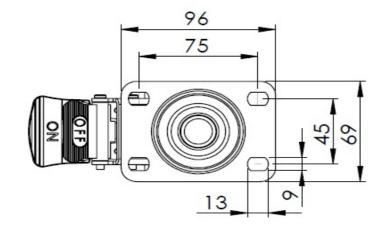

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.