1129 Medical Caster Series

Dersheng Casters Keep Rolling

Resolute Wheel Diameter × Wheel Width 125 x 31mm

EAN

TW-4112905004018

Casters with Total Brakes and a With locking system. Top Plate Riveted and Stamping - instrument Fork. Hole Zine-Plated, Mounting Type - Top Plate. High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread. Dark gray, Bearing - Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 125mm
Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 91 x 72.6mm **Bolt Hole Spacing** 72 x 53mm Plate Hole 10mm Offset 37.5mm Swivel Interference 212mm Overall Height 164mm **Swivel Radius** 106mm Hardness Of Tread 72±5° Shore A Load Capacity (Dynamic) 147kgs

Load Capacity (Dynamic) 147kgs

Load Capacity (Static) 220.5kgs

Temperature -20°C to +60°C

Fork Type Swivel Caster With Total Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.85kgs

Standard ISO22883

Advantages at a glance


Rolling Resistance

• • • • •


Operating Noise

Floor Surface Preservation • • • • •

Dimensions

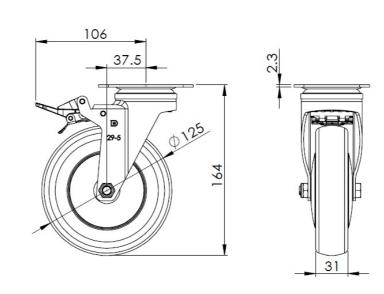

Mounting

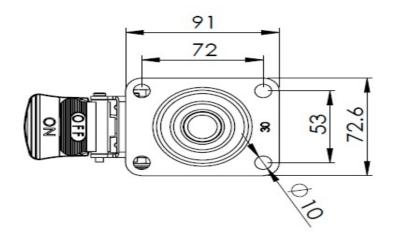

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.