1129 Medical Caster Series

Dersheng Casters Keep Rolling

W Resolute Wheel Diameter × Wheel Width 125 x 31mm

EAN

TW-4112905004023

Casters with Side Brakes and With locking system. Riveted Stamping Top Plate instrument stand. Hole


Zine-Plated, Mounting Type - Top Plate.
Reinforced, impact-resistant polypropylene Wheel Center with High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread.

Dark gray, Bearing - Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

125mm Wheel Diameter Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 91 x 72.6mm **Bolt Hole Spacing** 72 x 53mm Plate Hole 10mm Offset 37.5mm Swivel Interference 200mm Overall Height 164mm Swivel Radius 100mm

Hardness Of Tread 72±5° Shore A 147kgs Load Capacity (Dynamic)

Load Capacity (Static) 220.5kgs Temperature -20°C to +60°C

Swivel Caster With Side Brake Fork Type

Stainless N/A **Electrical Conductivity** N/A Anti-Static N/A 0.85kgs Weight Standard ISO22883


Advantages at a glance

Rolling Resistance


Operating Noise

Floor Surface Preservation • • • • •

Dimensions

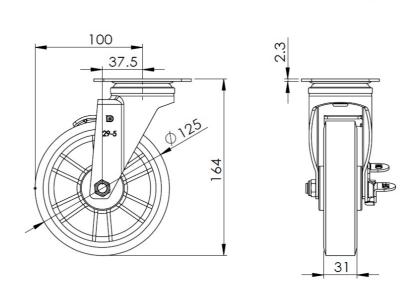

Mounting

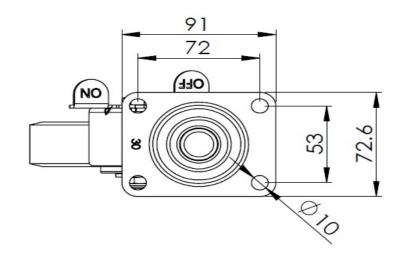

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.