



1130 Medium Duty General Purposes Caster Series


Cast Iron Wheel Diameter × Wheel Width 75 x 30mm

EAN
TW-4113003001026

Rigid Caster with Stamping Fabricated Caster Fork and 75 x 45 mm (3" x 1-3/4") Bolt Hole Spacing. Zine-Plated, Mounting Type - Top Plate. Cast Iron core and Wheel Tread. Black, Plain Bearing.

Wheel tread: cast iron
Wheel Center: cast iron

Drawings are for reference only and may differ from the product

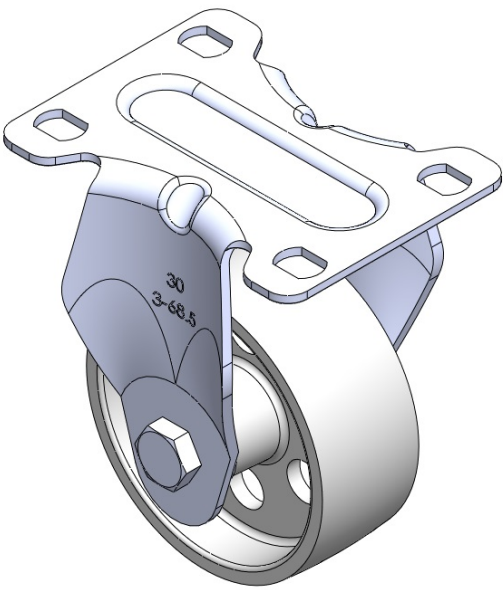

Picture may differ from original product


Technical Data

☒ Imperial ☐ Metric	
Wheel Diameter	3 "
Wheel Width	1-3/16 "
Wheel Bearing	Wheel With Plain Bearing
Plate Size	3-11/16 " x 2-13/16 "
Bolt Hole Spacing	3
Plate Hole	1/2 " x 23/64 "
Overall Height	4-1/4 "
Load Capacity (Dynamic)	154lbs
Load Capacity (Static)	231lbs
Temperature	-4°F to +482°F
Fork Type	Rigid Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.9lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ○ ○ ○ ○
Floor Surface Preservation	● ○ ○ ○ ○

Dimensions

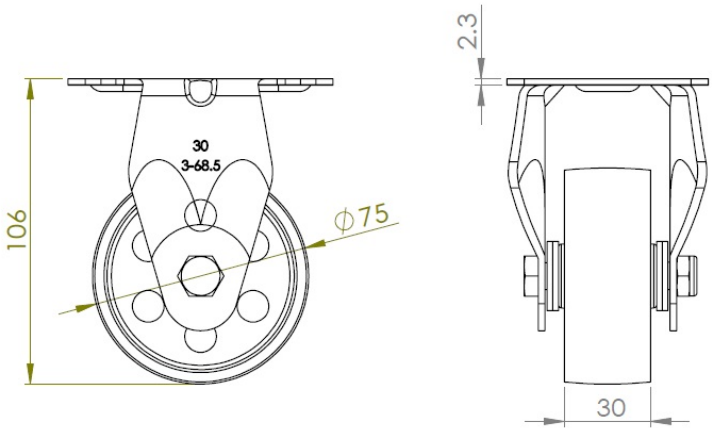

Mounting

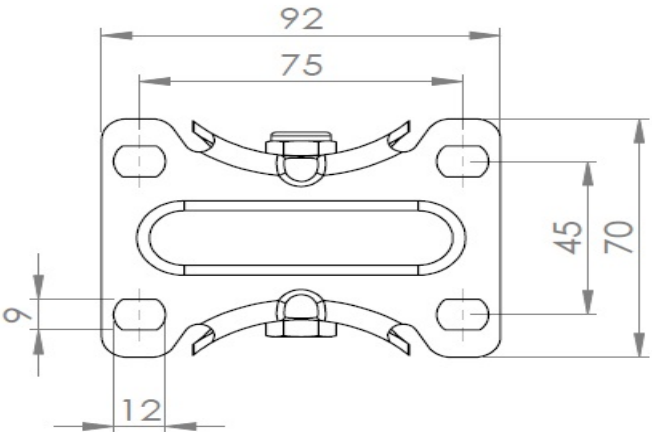

* For any deviation between metric and imperial spec, please refer to the metric spec.