1130 Medium Duty General Purposes Caster Series

Dersheng Casters Keep Rolling

Nylon Wheel Diameter × Wheel Width 75 x 31mm

EAN


TW-4113003002019

Swivel Caster, Riveted Stamping Fork - 1/2-12 threads Zine-Plated, Mounting Type - Threaded Stem Reinforced Polypropylene core and Wheel Tread Bearing - Plain Bearing

Wheel Center: thermoplastic

Wheel surface: Thermoplastic

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

Temperature

Standard

● Imperial ○ Metric

Wheel Diameter 3 "

Wheel Width 1-1/4 "

Wheel Bearing Wheel With Plain Bearing

-13°F to +176°F

ISO22883

Threaded Stem 1/2"-12牙 1-5/16 " Threaded Size 1-3/8 " Offset 5-13/16" Swivel Interference 4-5/16 " Overall Height 2-15/16" **Swivel Radius** Hardness Of Tread 70±5° Shore D Load Capacity (Dynamic) 220lbs

Load Capacity (Dynamic) 220lbs

Load Capacity (Static) 331lbs

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.1lbs

Advantages at a glance

Rolling Resistance


••••

Operating Noise


• • 0 0 0

Floor Surface Preservation • • • • • •

Dimensions

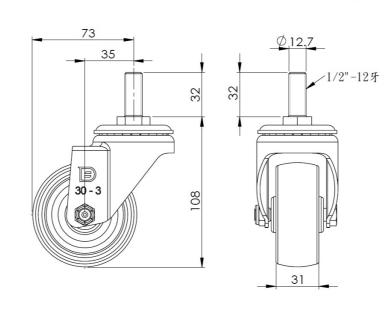

Mounting

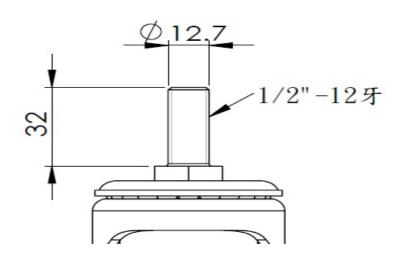

 $[\]boldsymbol{\ast}$ For any deviation between metric and imperial spec, please refer to the metric spec.