

1130 Medium Duty General Purposes Caster Series




AQPU (blue) Wheel Diameter × Wheel Width 100 x 31mm

EAN  
TW-4113004004039

Casters with Total Brakes and With locking system. Threaded Stem Riveted Pressed Fork —1/2-12.  
Zine-Plated, Mounting Type - Top Plate.  
Aluminum wheel center, High Quality Polyurethane Wheel Tread.  
Blue color, Bearing—Ball Bearings.

Wheel tread: high quality polyurethane  
Wheel Center: aluminum core

Drawings are for reference only and may differ from the product

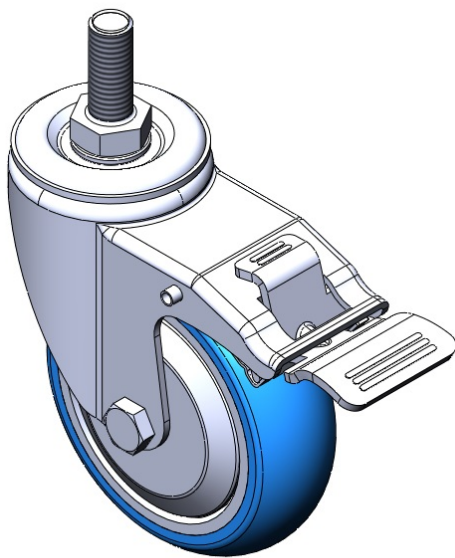

Picture may differ from original product


Technical Data

|                         |                                |
|-------------------------|--------------------------------|
| ● Metric ○ Imperial     |                                |
| Wheel Diameter          | 100mm                          |
| Wheel Width             | 31mm                           |
| Wheel Bearing           | Wheels With Ball Bearings      |
| Threaded Stem           | 1/2 " -12牙                     |
| Threaded Size           | 32mm                           |
| Offset                  | 33mm                           |
| Swivel Interference     | 240mm                          |
| Overall Height          | 131mm                          |
| Swivel Radius           | 120mm                          |
| Hardness Of Tread       | 87±5° Shore A                  |
| Load Capacity (Dynamic) | 230kgs                         |
| Load Capacity (Static)  | 345kgs                         |
| Temperature             | -20°C to +70°C                 |
| Fork Type               | Swivel Caster With Total Brake |
| Stainless               | N/A                            |
| Electrical Conductivity | N/A                            |
| Anti-Static             | N/A                            |
| Weight                  | 0.75kgs                        |
| Standard                | ISO22883                       |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

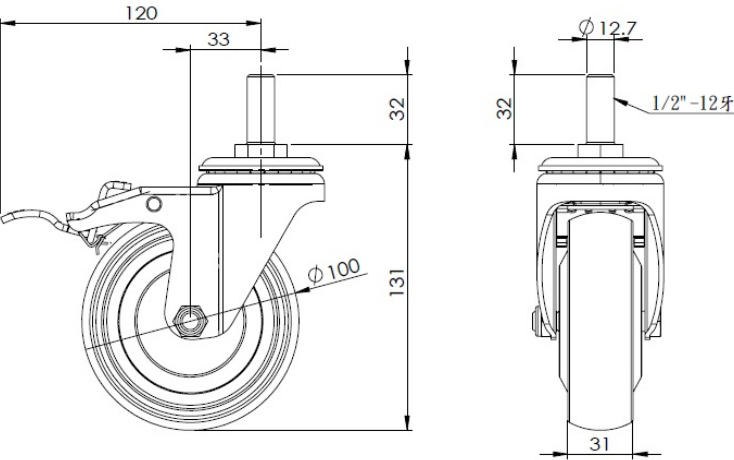

Mounting

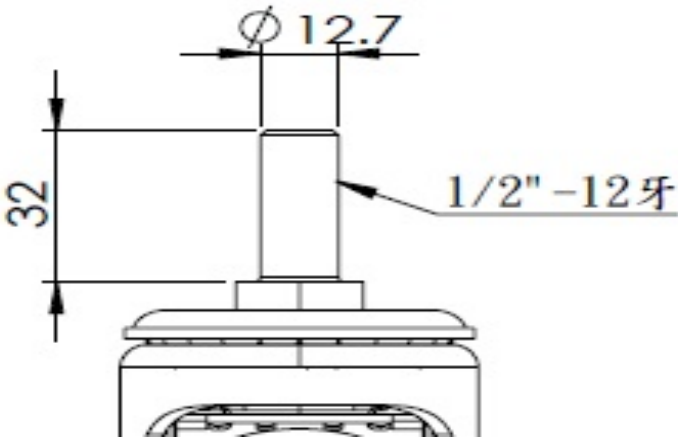

\* For any deviation between metric and imperial spec, please refer to the metric spec.