

1153 Heavy Duty 2" Wide General Purposes Caster Series




AQPU (brown) Wheel Diameter × Wheel Width 150 x 42mm

EAN  
TW-4115306002057

Swivel Caster with Riveted Fork and Stamping Fork.  
Zine-Plated, Top Plateed Mounting Type.  
Aluminum wheel center with High Quality Polyurethane Wheel Tread.  
Brown color, Ball Bearings.

Wheel tread: high quality polyurethane  
Wheel Center: aluminum core

Drawings are for reference only and may differ from the product

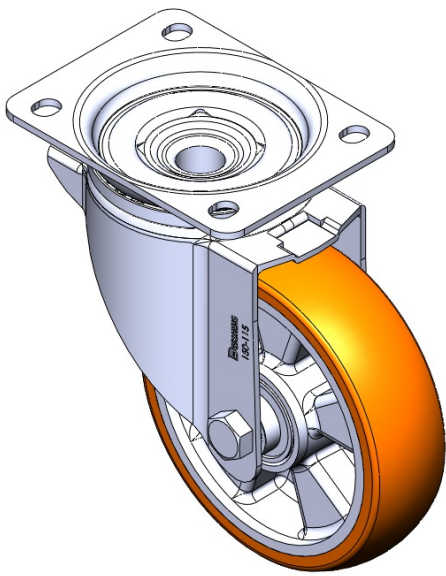

Picture may differ from original product


Technical Data

|                                                                        |                           |
|------------------------------------------------------------------------|---------------------------|
| <input checked="" type="radio"/> Metric <input type="radio"/> Imperial |                           |
| Wheel Diameter                                                         | 150mm                     |
| Wheel Width                                                            | 42mm                      |
| Wheel Bearing                                                          | Wheels With Ball Bearings |
| Plate Size                                                             | 137 x 105mm               |
| Bolt Hole Spacing                                                      | 105 x 77.5mm              |
| Plate Hole                                                             | 13.5 x 11mm               |
| Offset                                                                 | 55mm                      |
| Swivel Interference                                                    | 260mm                     |
| Overall Height                                                         | 190mm                     |
| Swivel Radius                                                          | 130mm                     |
| Hardness Of Tread                                                      | 92±5° Shore A             |
| Load Capacity (Dynamic)                                                | 350kgs                    |
| Load Capacity (Static)                                                 | 525kgs                    |
| Temperature                                                            | -20°C to +70°C            |
| Fork Type                                                              | Swivel Caster             |
| Stainless                                                              | N/A                       |
| Electrical Conductivity                                                | N/A                       |
| Anti-Static                                                            | N/A                       |
| Weight                                                                 | 2.00kgs                   |
| Standard                                                               | ISO22883                  |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

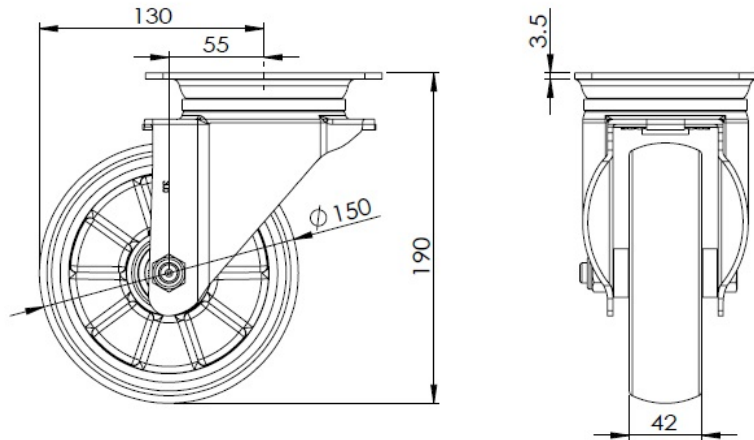

Mounting

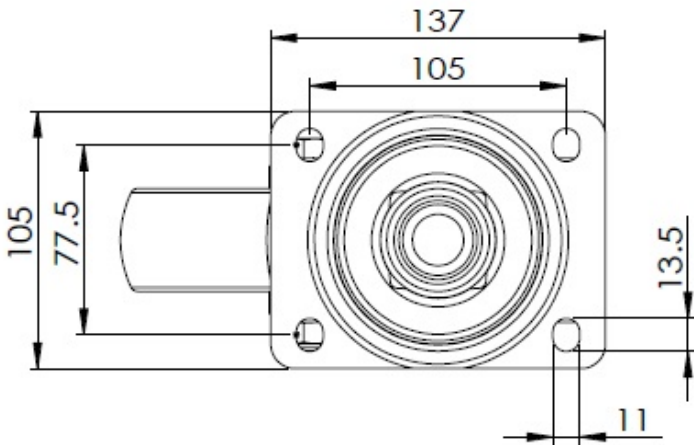

\* For any deviation between metric and imperial spec, please refer to the metric spec.