

1153 Heavy Duty 2" Wide General Purposes Caster Series




EQPU (blue) Wheel Diameter × Wheel Width 150 x 42 mm

EAN
TW-4115306004045

Casters with a front brake and With locking system. Top Plate Riveted and Stamping. Zine-Plated, Mounting Type - Top Plate. Cast Iron core, High Quality Polyurethane Wheel Tread (extra-thick rubber). Blue color, Bearing—Ball Bearings.

Wheel tread: Made of high-quality polyurethane
Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

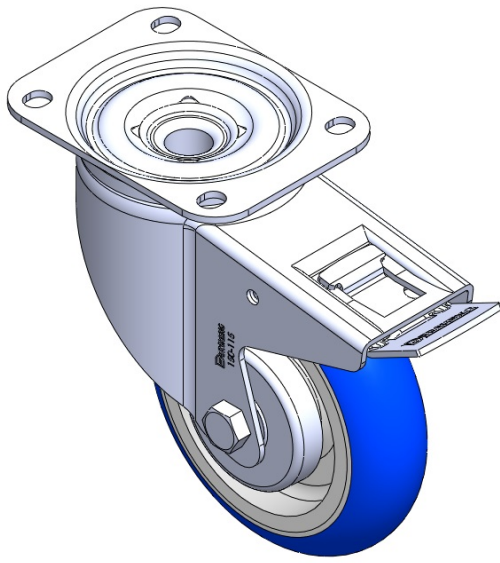

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter	150mm
Wheel Width	42mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	137 x 105mm
Bolt Hole Spacing	105 x 77.5mm
Plate Hole	13.5 x 11mm
Offset	60mm
Swivel Interference	330mm
Overall Height	190mm
Swivel Radius	165mm
Hardness Of Tread	87±5° Shore A
Load Capacity (Dynamic)	350kgs
Load Capacity (Static)	525kgs
Temperature	-20°C to +70°C
Fork Type	Swivel Caster With Front Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	3.30kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ● ●
Floor Surface Preservation	● ● ● ● ●

Dimensions

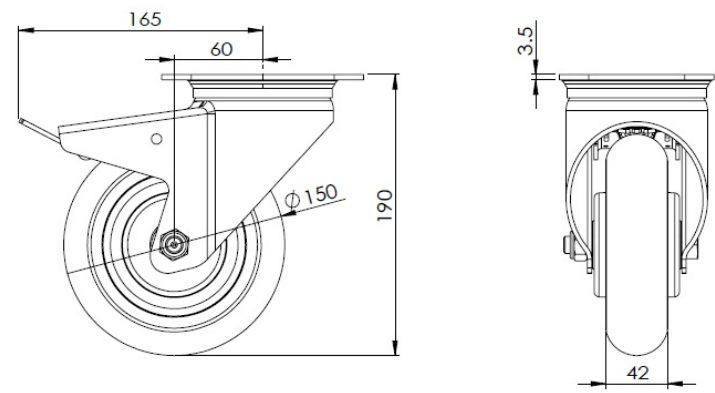

Mounting

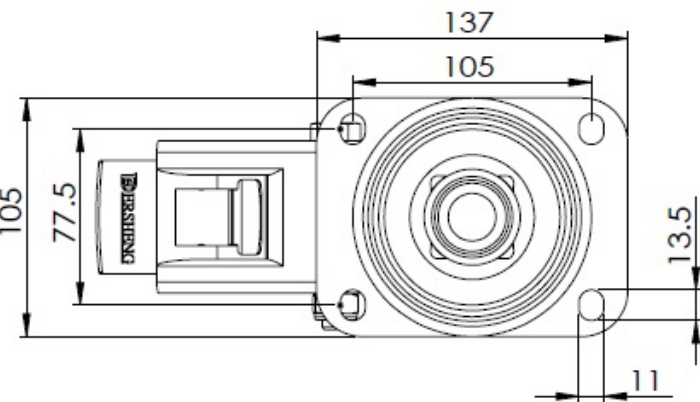

* For any deviation between metric and imperial spec, please refer to the metric spec.