


1109 Medium Duty/Low Profile Business Machine Caster Series

MRC (black) Wheel Diameter x Wheel Width 50 x 45mm

EAN

YJ-11090200051033

Rigid Caster, Welded footplate - high-grade hole Extended control lever surface, Mounting Type - Top Plate device Reinforced Polypropylene and Wheel Tread Black, Bearing - Ball Bearing.

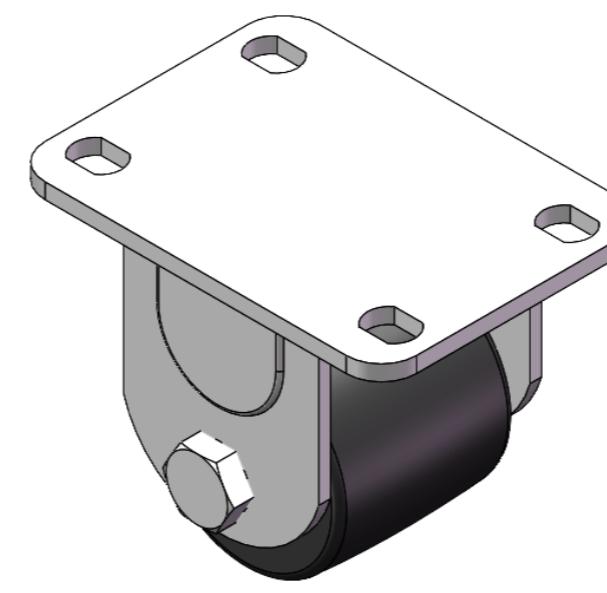

Wheel Tread: Thermoplastic (PA6)
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data


Metric Imperial

Wheel Diameter	50mm
Wheel Width	45mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	95 x 70mm
Bolt Hole Spacing	75 x 45mm
Plate Hole	12 x 9mm
Overall Height	74mm
Hardness Of Tread	75±5° Shore D
Load Capacity (Dynamic)	200kgs
Load Capacity (Static)	300kgs
Temperature	-20°C to +80°C
Fork Type	Rigid Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.53kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • ○ ○ ○
Floor Surface Preservation	• • ○ ○ ○

Dimensions

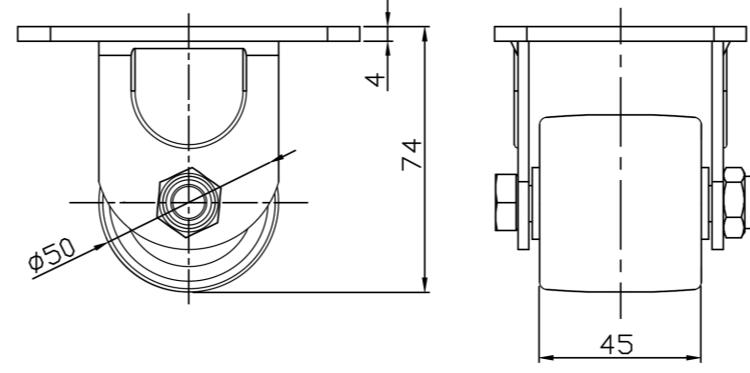

Mounting

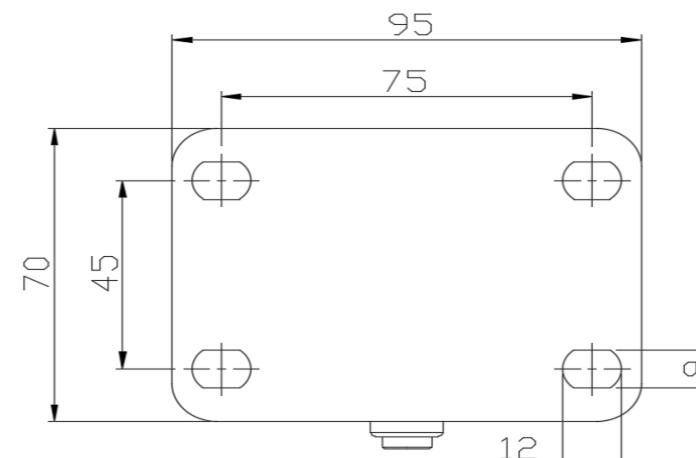

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com