


1109 Medium Duty/Low Profile Business Machine Caster Series

MRC (black) Wheel Diameter x Wheel Width 50 x 45mm

EAN

YJ-11090200055413

Swivel Caster, thread-Riveted Stamping Fork—M12-P1.75 Zinc-Plated, Mounting Type - Threaded Stem Thermoplastic core and tread Black, Bearing—Ball Bearing.

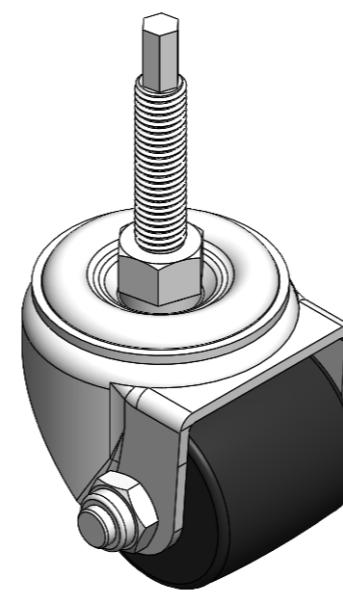Wheel Tread: Thermoplastic (PA6)
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data


 Metric Imperial

Wheel Diameter	50mm
Wheel Width	45mm
Wheel Bearing	Wheels With Ball Bearings
Threaded Stem	M12-P1.75
Threaded Size	60mm
Offset	17mm
Swivel Interference	94mm
Overall Height	76.8mm
Swivel Radius	47mm
Hardness Of Tread	75±5° Shore D
Load Capacity (Dynamic)	200kgs
Load Capacity (Static)	300kgs
Temperature	-20°C to +80°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.61kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ●
Operating Noise	● ● ○ ○ ○
Floor Surface Preservation	● ● ○ ○ ○

Dimensions

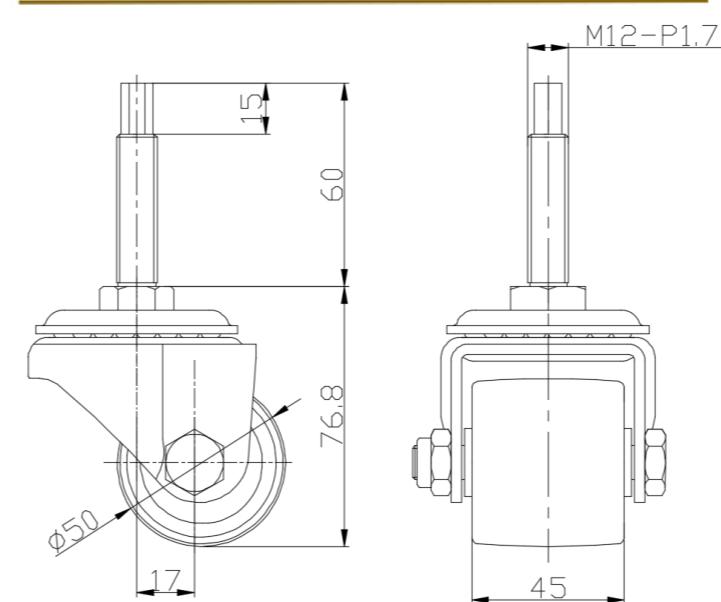

Mounting

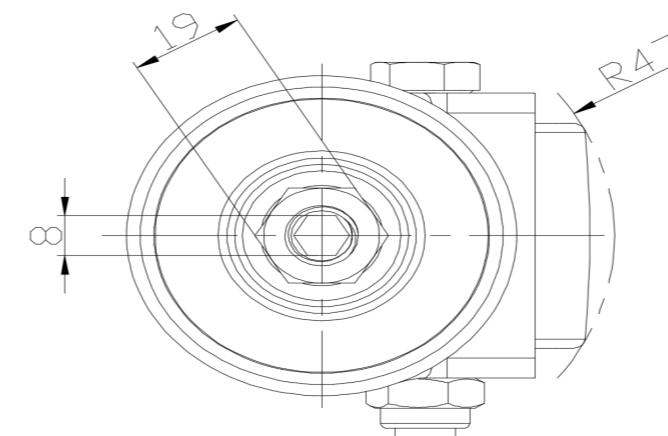

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com