1109 Medium Duty/Low Profile Business Machine Caster Series



ZQPU (Milled Blue) Wheel Diameter × Wheel Width 50× 20 (41.5) mm


EAN

YJ-11090200805013

Swivel Caster, thread-Riveted Stamping Fork—M16-P2 Zine-Plated, Mounting Type - Threaded Stem Cast Iron Wheel Center, High Quality Polyurethane tread Blue color, Bearing—Ball Bearing.

Wheel Tread: high quality polyurethane Wheel Center: cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 50mm
Wheel Width 41.5mm

Wheel Bearing Wheels With Ball Bearings

Threaded Stem M16-P2
Threaded Size 25mm
Offset 17mm
Swivel Interference 92mm
Overall Height 77mm
Swivel Radius 46mm

Hardness Of Tread 87±5° Shore A
Load Capacity (Dynamic) 300kgs
Load Capacity (Static) 450kgs

Temperature -20°C to +70°C
Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.7kgs

Standard ISO22883


Advantages at a glance

Rolling Resistance


Operating Noise

Floor Surface Preservation • • • • •

Dimensions

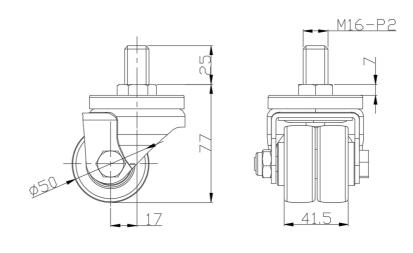

Mounting

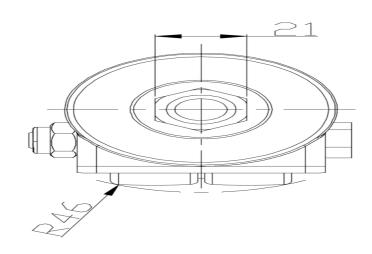

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.