

## 1110-YOYO YOYO Series-Light Duty Twin Wheel Caster Series (All Plastic)




Yoyo Wheel (black dark gray) Wheel Diameter x Wheel Width 72.8 x 20mm

EAN

YJ-11100300246033

Single Brake locking system, thread-Riveted injection-molded Fork (M8-P1.75). reinforced Polypropylene Fork, Mounting Type - Threaded Stem. Polypropylene (PP) core, polyvinyl chloride (PVC) tread. Dark gray, Anti-thread wheel cover.

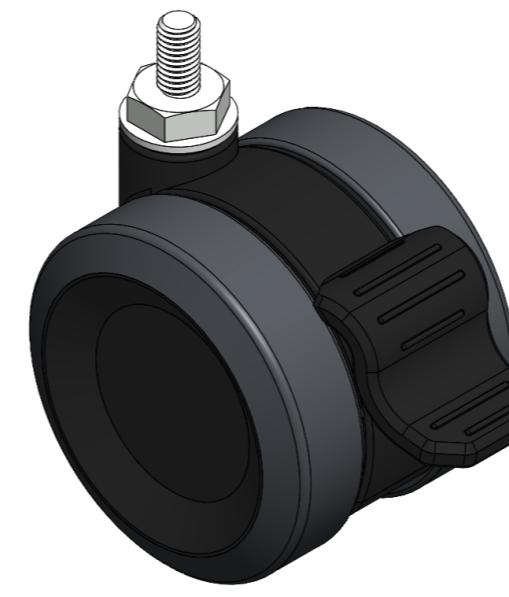

Wheel Tread: PVC polyvinyl chloride  
Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product

Picture may differ from original product

## Technical Data

Imperial  Metric

Wheel Diameter 2-15/16

Wheel Width 2-1/2 "

Wheel Bearing Wheel With Plain Bearing

Threaded Stem M8-P1.75

Threaded Size 5/8 "

Offset 1 "

Swivel Interference 6-13/16 "

Overall Height 3-5/16 "

Swivel Radius 3-7/16 "

Hardness Of Tread 95±5° Shore A

Load Capacity (Dynamic) 99lbs

Load Capacity (Static) 149lbs

Temperature -4°F to +140°F

Fork Type Swivel Caster With Wheel Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.6lbs

Standard ISO22883


## Advantages at a glance

Rolling Resistance • • • •


Operating Noise • • • •

Floor Surface Preservation • • • •

## Dimensions

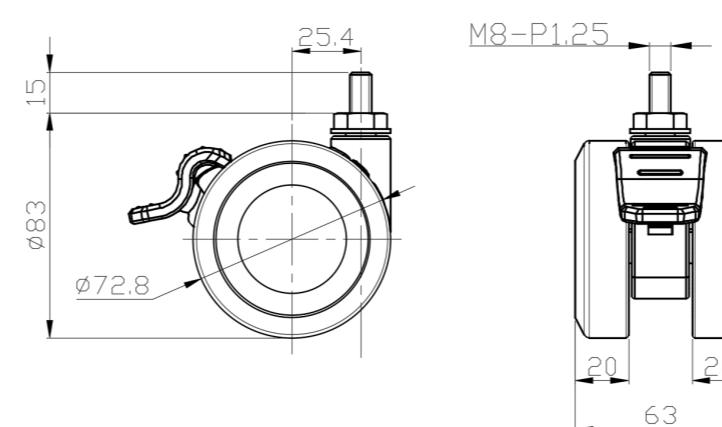

## Mounting

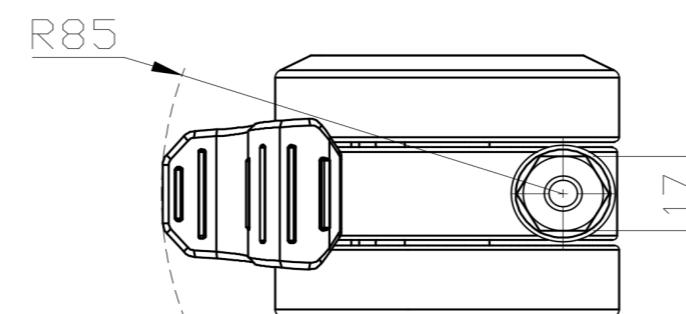

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com