# 1110-YOYO YOYO Series-Light Duty Twin Wheel Caster Series (All Plastic)

Dersheng Casters Keep Rolling

Yoyo Wheel (light dark gray) Wheel Diameter x Wheel Width 72.8 x 20mm

EAN

## YJ-11100300246273

Caster with a single-brake With locking system, thread-Riveted, Injection Molding Fork (3/8"-16). reinforced Polypropylene Fork with Mounting Type - Threaded Stem. Polypropylene (PP) core, polyvinyl chloride (PVC) Wheel Tread. White-dark gray, Plain Bearing.

Wheel surface: PVC polyvinyl chloride Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

#### Technical Data

	mperial	$\bigcirc$	Metric
--	---------	------------	--------

Wheel Diameter 2-15/16
Wheel Width 2-1/2 "

Wheel Bearing Wheel With Plain Bearing

Threaded Stem 3/8 " -16

Threaded Size 1 "

Offset 1 "

Swivel Interference 6-13/16 "

Overall Height 3-5/16 "

Swivel Radius 3-7/16 "

Hardness Of Tread 95±5° Shore A

Load Capacity (Dynamic) 99lbs

Load Capacity (Dynamic) 99ibs

Load Capacity (Static) 149lbs

Temperature -4°F to +140°F

Fork Type Swivel Caster With Wheel Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.6lbs

Standard ISO22883

# Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • •

### **Dimensions**

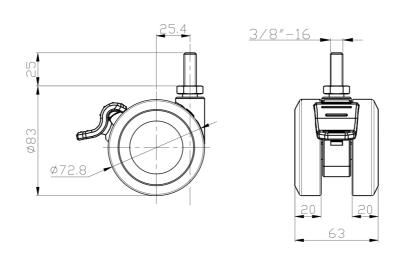

# Mounting

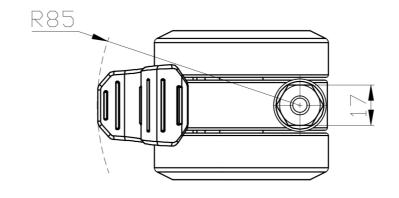

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.