1110-YOYO YOYO Series-Light Duty Twin Wheel Caster Series (All Plastic)

Dersheng Casters Keep Rolling

Yoyo Wheel (White dark gray) Wheel Diameter x Wheel Width 100 x 22mm

EAN

YJ-11100400242023

Swivel Caster with injection-molded Fork Riveted to Forkplate. reinforced Polypropylene Fork, Top Platetype (3T) Mounting Type system Polypropylene (PP) Wheel Center, polyvinyl chloride (PVC) tread White-dark gray, Bearing—Ball Bearing.

Wheel Tread: PVC polyvinyl chloride Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

Fork Type

● Metric ○ Imperial

Wheel Diameter 100mm
Wheel Width 68mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 60 x 60mm **Bolt Hole Spacing** 42.5 x 42.5mm Plate Hole 11 x 6mm Offset 32mm Swivel Interference 176mm Overall Height 115mm **Swivel Radius** 88mm Hardness Of Tread 95±5° Shore A Load Capacity (Dynamic) 100kgs

Load Capacity (Static) 150kgs

Temperature -20°C to +60°C

Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.54kgs

Standard ISO22883

Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • •

Dimensions

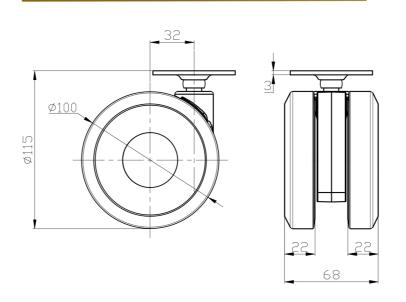

Mounting

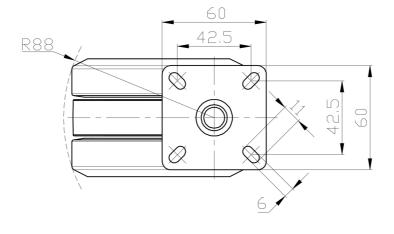

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.