

1110-YOYO YOYO Series-Light Duty Twin Wheel Caster Series (All Plastic)

Yoyo Wheel (White dark gray) Wheel Diameter x Wheel Width 100 x 22mm

EAN

YJ-11100400244043

Castors with single brake Locking system, Fork Riveted injection moulded Fork. Frame made of reinforced High-quality Impact Resistance Polypropylene, Top Plate (3T) Mounting Type Wheel core made of High-quality Impact Resistance Polypropylene (PP), Wheel Tread made of polyvinyl chloride (PVC) White dark grey, Bearing – Ball Bearing.

Wheel Tread: PVC polyvinyl chloride
Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product


Technical Data

☒ Imperial ☐ Metric	
Wheel Diameter	4 "
Wheel Width	2-3/4 "
Wheel Bearing	Wheels With Ball Bearings
Plate Size	2-7/16 " x 2-7/16 "
Bolt Hole Spacing	1-11/16"x1-11/16"
Plate Hole	3/8 " x 1/4 "
Offset	1-5/16 "
Swivel Interference	8-1/2 "
Overall Height	4-9/16 "
Swivel Radius	4-1/4 "
Hardness Of Tread	95±5° Shore A
Load Capacity (Dynamic)	220lbs
Load Capacity (Static)	331lbs
Temperature	-4°F to +140°F
Fork Type	Swivel Caster With Wheel Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	1.3lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	• • • • •
Operating Noise	• • • • •
Floor Surface Preservation	• • • • •

Dimensions

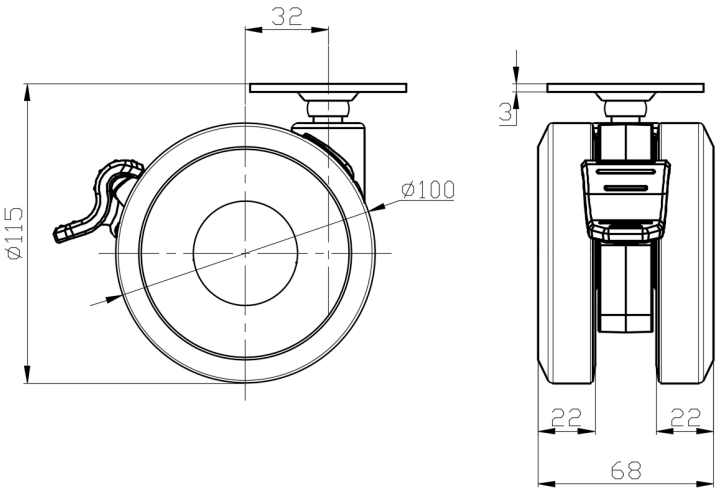

Mounting

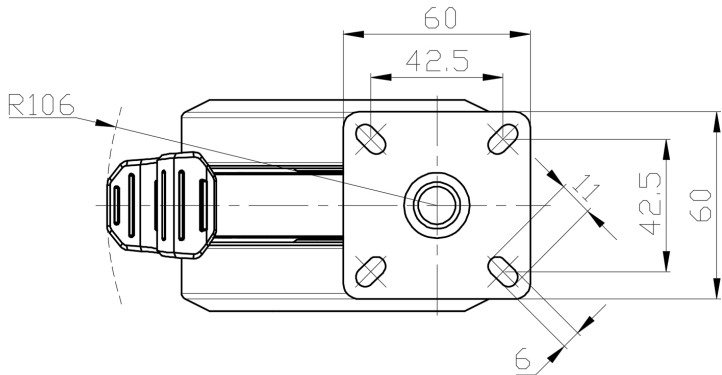

* For any deviation metric and imperial spec, please refer to the metric spec.