1110-YOYO YOYO Series-Light Duty Twin Wheel Caster Series (All Plastic)

Dersheng Casters Keep Rolling

Yoyo Wheel (black dark gray) Wheel Diameter x Wheel Width 100 x 22mm

EAN

YJ-11100400245053

Swivel Caster, thread-Riveted Injection Molding Fork - 3/8"-16" reinforced Polypropylene Fork, Mounting Type - Threaded Stem Polypropylene (PP) core, polyvinyl chloride (PVC) Wheel Tread Dark gray, Bearing - Ball Bearings.

Wheel surface: PVC polyvinyl chloride Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 100mm
Wheel Width 68mm

Wheel Bearing Wheels With Ball Bearings

Threaded Stem 3/8"-16

Threaded Size 25mm

Offset 32mm

Swivel Interference 176mm

Overall Height 108.5mm

Swivel Radius 88mm

Hardness Of Tread 95±5° Shore A

Load Capacity (Dynamic) 100kgs

Load Capacity (Static) 150kgs

Temperature -20°C to +60°C

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Anti-Static N/A
Weight 0.48kgs
Standard ISO22883

Advantages at a glance


Rolling Resistance

• • • • •


Operating Noise

Floor Surface Preservation • • • • •

Dimensions

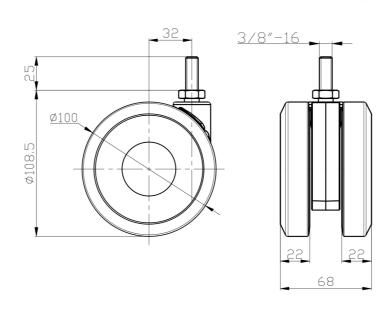

Mounting

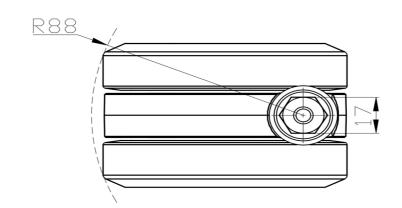

 $[\]boldsymbol{\ast}$ For any deviation between metric and imperial spec, please refer to the metric spec.