

## 1110-YOYO YOYO Series-Light Duty Twin Wheel Caster Series (All Plastic)



Yoyo Wheel (White dark gray) Wheel Diameter x Wheel Width 100 x 22mm

EAN

YJ-11100400246363

Single Brake locking system, thread-Riveted injection-molded Fork (M12-P1.75). reinforced Polypropylene Fork, Mounting Type - Threaded Stem. Polypropylene (PP) core, polyvinyl chloride (PVC) tread. White-dark gray. Bearing: Ball Bearing.



Wheel Tread: PVC polyvinyl chloride  
Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product

Picture may differ from original product

## Technical Data


Metric  Imperial

Wheel Diameter	100mm
Wheel Width	68mm
Wheel Bearing	Wheels With Ball Bearings
Threaded Stem	M12-P1.75
Threaded Size	25mm
Offset	32mm
Swivel Interference	212mm
Overall Height	108.5mm
Swivel Radius	106mm
Hardness Of Tread	95±5° Shore A
Load Capacity (Dynamic)	100kgs
Load Capacity (Static)	150kgs
Temperature	-20°C to +60°C
Fork Type	Swivel Caster With Wheel Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.52kgs
Standard	ISO22883


## Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • • •
Floor Surface Preservation	• • • •

## Dimensions

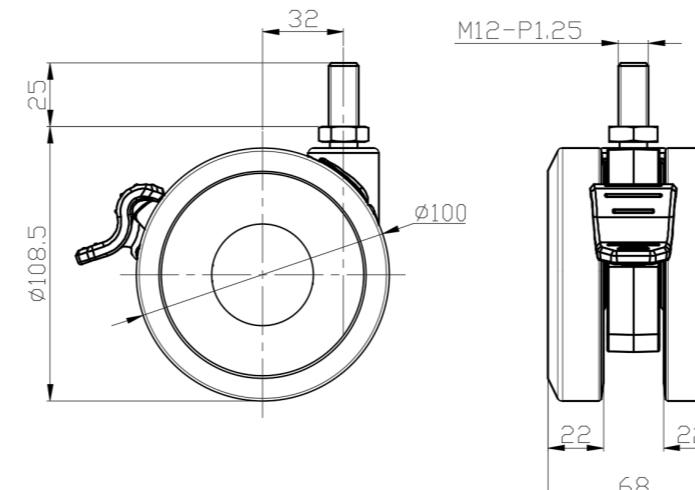

## Mounting

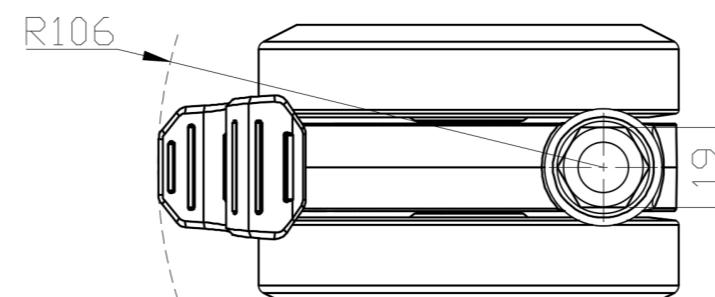

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com