# 1110-YOYO YOYO Series-Light Duty Twin Wheel Caster Series (All Plastic)

Dersheng Casters Keep Rolling

Yoyo Wheel (White dark gray) Wheel Diameter x Wheel Width 100 x 22mm

EAN

YJ-11100400246423

Caster with a single-brake With locking system, thread-Riveted, Injection Molding Fork (1/2"-12). reinforced Polypropylene Fork, Mounting Type - Threaded Stem. Polypropylene (PP) core, polyvinyl chloride (PVC) Wheel Tread. White-dark gray. Bearings: Ball Bearings.

Wheel surface: PVC polyvinyl chloride Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

#### Technical Data

● Imperial ○ Metric

Wheel Diameter 4 "

Wheel Width 2-3/4 "

Wheel Bearing Wheels With Ball Bearings

Threaded Stem 1/2 " -12

Threaded Size 1 "

Offset 1-5/16 "

Swivel Interference 8-1/2 "

Overall Height 4-5/16 "

Swivel Radius 4-1/4 "

Hardness Of Tread 95±5° Shore A

Load Capacity (Dynamic) 220lbs

Load Capacity (Static) 331lbs

Temperature -4°F to +140°F

Fork Type Swivel Caster With Wheel Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.1lbs

Standard ISO22883

## Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • •

### Dimensions

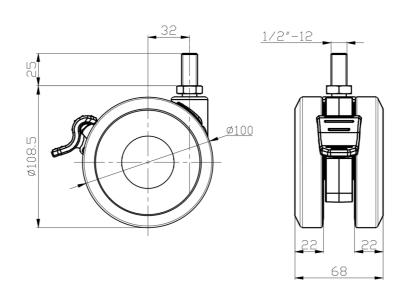

## Mounting

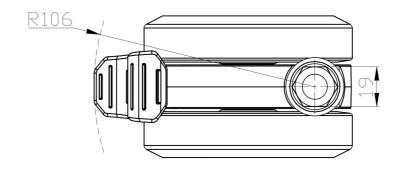

 $<sup>\</sup>boldsymbol{\ast}$  For any deviation between metric and imperial spec, please refer to the metric spec.