



1111 Institutional Caster Series

AQPU (brown round) Wheel Diameter × Wheel Width 125 x 31mm


EAN

YJ-11110500608013

Castors with Total Brake Locking system. Single Bolthole Stamping Fork - Ø12.5  
Extended control lever surface, Mounting Type - Single Bolthole device Aluminum core,  
High Quality Polyurethane Wheel Tread Gray, Bearing - Ball Bearing.

Wheel tread: Made of high quality polyurethane  
Wheel Center: Aluminum core

Drawings are for reference only and may differ from the product

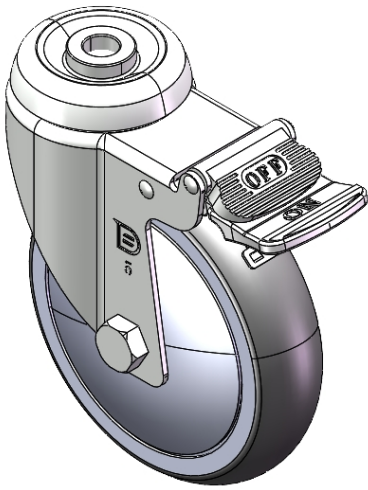

Picture may differ from original product


Technical Data

|                                                                        |                                |
|------------------------------------------------------------------------|--------------------------------|
| <input checked="" type="radio"/> Metric <input type="radio"/> Imperial |                                |
| Wheel Diameter                                                         | 125mm                          |
| Wheel Width                                                            | 31mm                           |
| Wheel Bearing                                                          | Wheels With Ball Bearings      |
| Single Bolt HoleCentre Hole                                            | 12.5mm                         |
| Offset                                                                 | 35.5mm                         |
| Swivel Interference                                                    | 220mm                          |
| Overall Height                                                         | 157mm                          |
| Swivel Radius                                                          | 110mm                          |
| Hardness Of Tread                                                      | 92±5° Shore A                  |
| Load Capacity (Dynamic)                                                | 230kgs                         |
| Load Capacity (Static)                                                 | 345kgs                         |
| Temperature                                                            | -20°C to +70°C                 |
| Fork Type                                                              | Swivel Caster With Total Brake |
| Stainless                                                              | N/A                            |
| Electrical Conductivity                                                | N/A                            |
| Anti-Static                                                            | N/A                            |
| Weight                                                                 | 1.01kgs                        |
| Standard                                                               | ISO22883                       |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

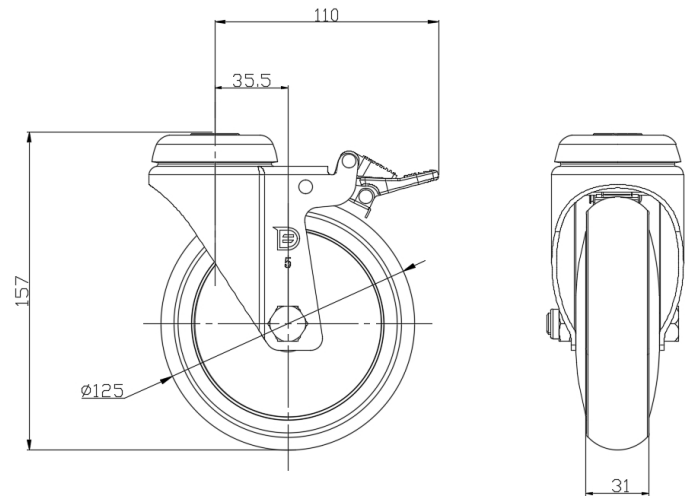

Mounting

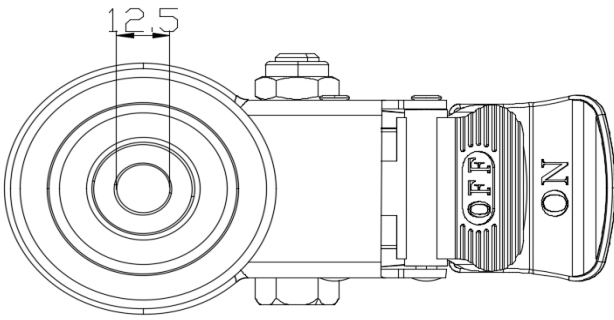

\* For any deviation between metric and imperial spec, please refer to the metric spec.