1124 1-1/2" Wide General Purposes Caster Series



Cast Iron Wheel Diameter × Wheel Width 93 x 28mm


EAN

YJ-11240400144013

Casters with a center brake and With locking system. Top Plate Riveted and Stamping 85 x 70mm (3-3/8" x 2-3/4") Bolt Hole Spacing.
Zine-Plated, Top Plate (4.5T) Mounting Type system.
Cast Iron Wheel Center and Wheel Tread.
Black, Bearing—Ball Bearings.

Wheel tread: cast iron
Wheel Center: cast iron

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 93mm
Wheel Width 28mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 115 x 100mm **Bolt Hole Spacing** 85 x 70mm Plate Hole 20 x 11mm Offset 30mm 212mm **Swivel Interference** Overall Height 138.5mm Swivel Radius 106mm Hardness Of Tread ° Shore A Load Capacity (Dynamic) 175kgs Load Capacity (Static) 262.5kgs Temperature -20°C to +250°C

Fork Type Swivel Caster With Rear Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 2.14kgs

Standard ISO22883

Advantages at a glance

Rolling Resistance


• • • • •


Operating Noise

ullet 0 0 0 0


Floor Surface Preservation $\bullet \circ \circ \circ \circ$

Dimensions





Mounting

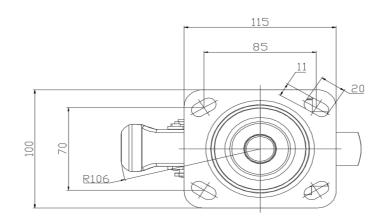

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.