# 1129 Medical Caster Series

Dersheng Casters Keep Rolling

Resolute (Pearlescent dark gray) Wheel Diameter x Wheel Width 75 x 27mm

EAN


## YJ-11290300455123

Swivel Caster, thread-Riveted Stamping Fork—M12-P1.75 Extended control lever surface, Mounting Type - Threaded Stem High-quality Impact Resistance Polypropylene Wheel Center, High-Quality Thermoplastic Rubber (TPR) Wheel Tread Pearl-colored dark gray, Bearing—Ball Bearing.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

## **Technical Data**

	mperial	$\bigcirc$	Metric
--	---------	------------	--------

Wheel Diameter 3 "

Wheel Width 1-1/16 "

Wheel Bearing Wheels With Ball Bearings

Threaded Stem M12-P1.75

Threaded Size 2-3/16 "

Offset 1-3/16 "

Swivel Interference 5-3/8 "

Overall Height 4-3/8 "

Swivel Radius 2-11/16 "

Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 154lbs

Load Capacity (Static) 231lbs

Temperature -4°F to +140°F

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity

Anti-Static

N/A

Weight

0.9lbs

Standard

ISO22883

# Advantages at a glance

Rolling Resistance


• • • •

**Operating Noise** 


• • • •

Floor Surface Preservation • • • • •

## Dimensions

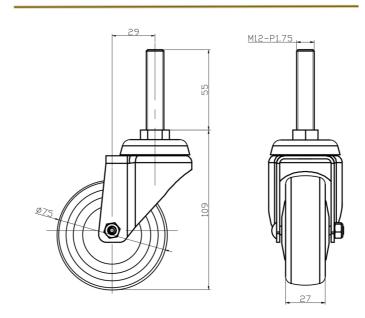

Mounting

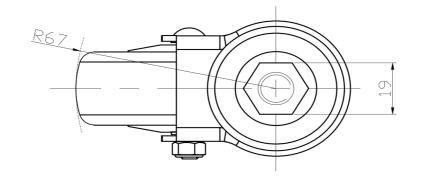

 $<sup>\</sup>boldsymbol{\ast}$  For any deviation between metric and imperial spec, please refer to the metric spec.