1129 Medical Caster Series

Dersheng Casters Keep Rolling

Resolute (Pearlescent dark gray) Wheel Diameter x Wheel Width 75 x 27mm

EAN


YJ-11290300456033

Swivel Caster, thread-Riveted Stamping Fork—M10-P1.5 Extended control lever surface, Mounting Type - Threaded Stem High-quality Impact Resistance Polypropylene Wheel Center, High-Quality Thermoplastic Rubber (TPR) Wheel Tread Pearl-colored dark gray, Bearing—Ball Bearing.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 75mm
Wheel Width 27mm

Wheel Bearing Wheels With Ball Bearings

Threaded Stem M10-P1.5

Threaded Size 25mm

Offset 29mm

Swivel Interference 170mm

Overall Height 109mm

Swivel Radius 85mm

Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 70kgs

Load Capacity (Static) 105kgs

Temperature -20°C to +60°C

Fork Type Swivel Caster With Total Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.41kgs

Standard ISO22883

Advantages at a glance

Rolling Resistance


• • • •

Operating Noise


• • • • •

Floor Surface Preservation • • • • •

Dimensions

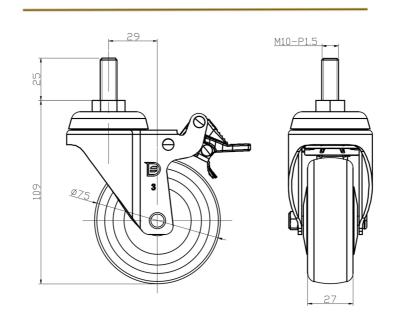

Mounting

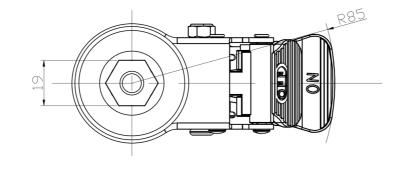

 $[\]boldsymbol{\ast}$ For any deviation between metric and imperial spec, please refer to the metric spec.