1129 Medical Caster Series

Dersheng Casters Keep Rolling

Resolute (Pearlescent dark gray) Wheel Diameter x Wheel Width 75 x 27mm

EAN


YJ-11290300457083

Swivel castor, hollow rivet Stamping Fork - 10.2 holes Surface Zine-Plated, Mounting Type - Single Bolthole device High-quality Impact Resistance Polypropylene Wheel Center, High-Quality Thermoplastic Rubber (TPR) Wheel Tread Pearl dark gray, Bearing - Ball Bearing.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 75mm
Wheel Width 27mm

Wheel Bearing Wheels With Ball Bearings

Single Bolt HoleCentre Hole 10.2mm

Offset 29mm

Swivel Interference 134mm

Overall Height 104mm

Swivel Radius 67mm

Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 70kgs

Load Capacity (Static) 105kgs

Temperature -20°C to +60°C

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.36kgs

Standard ISO22883

Advantages at a glance

Rolling Resistance


• • • • •


Operating Noise

• • • • •


Floor Surface Preservation • • • • •

Dimensions





Mounting

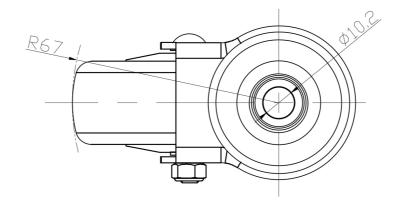

 $^{{}^{*}}$ For any deviation between metric and imperial spec, please refer to the metric spec.