1129 Medical Caster Series

Dersheng Casters Keep Rolling

Rubber Wheel Diameter × Wheel Width 100 x 30.5mm


EAN

YJ-11290400065013

Swivel Caster, thread-Riveted Stamping Fork—M12-P1.75 Extended control lever surface, Mounting Type - Threaded Stem device Reinforced Polypropylene, High-Quality Resilient Rubber Wheel Tread Wheel—Anti-thread wheel cover

Wheel Tread: high quality elastic rubber Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 100mm
Wheel Width 30.5mm

Wheel Bearing Wheel With Plain Bearing

Threaded Stem M12-P1.75

Threaded Size 29mm

Offset 43.4mm

Swivel Interference 188mm

Overall Height 137mm

Swivel Radius 94mm

Hardness Of Tread 80±5° Shore A

Load Capacity (Dynamic) 80kgs
Load Capacity (Static) 120kgs

Temperature -20°C to +120°C
Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.84kgs

Standard ISO22883

Advantages at a glance

Rolling Resistance


• • • 0

Operating Noise


• • • 0

Floor Surface Preservation $\bullet \bullet \bullet \bullet \circ$

Dimensions

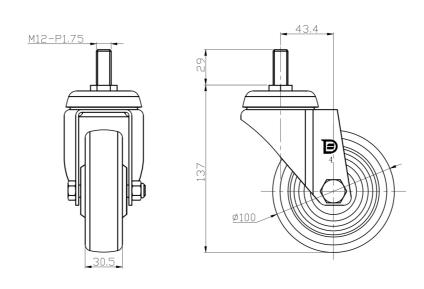

Mounting

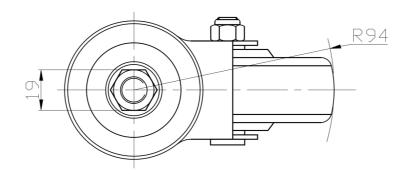

 $[\]boldsymbol{\ast}$ For any deviation between metric and imperial spec, please refer to the metric spec.