## 1129 Medical Caster Series

Dersheng Casters Keep Rolling

PPR (Pearlescent dark gray) Wheel Diameter × Wheel Width 100 x 31mm

EAN


YJ-11290400265093

Swivel Caster with Riveted Stamping Fork—3/8"-16"
Zine-Plated, Mounting Type - Threaded Stem
High-Quality Impact-Resistant Polypropylene core, High-Quality Reinforced Polypropylene
Rubber (TPR) Wheel Tread
Pearl-gray finish, Bearing—Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

## Technical Data

● Metric ○ Imperial

Wheel Diameter 100mm
Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Threaded Stem 3/8"-16

Threaded Size 25mm

Offset 43.4mm

Swivel Interference 188mm

Overall Height 137mm

Swivel Radius 94mm

Hardness Of Tread 82±5° Shore A
Load Capacity (Dynamic) 100kgs
Load Capacity (Static) 150kgs

Temperature -20°C to +60°C

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity

Anti-Static

N/A

Weight

0.69kgs

Standard

ISO22883


## Advantages at a glance

Rolling Resistance


**Operating Noise** 

Floor Surface Preservation • • • • •

## Dimensions

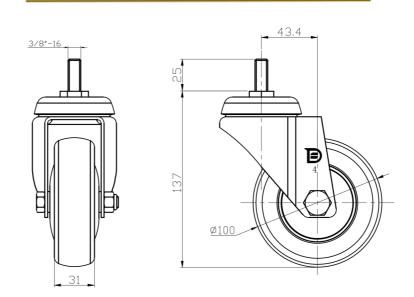

Mounting

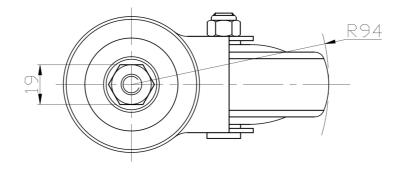

 $<sup>\</sup>boldsymbol{\ast}$  For any deviation between metric and imperial spec, please refer to the metric spec.