1129 Medical Caster Series

Rubber Wheel Diameter × Wheel Width 125 x 30.5mm


EAN

YJ-11290500067013

Swivel Caster, Riveted Stamping Fork—Ø21.6 x 56L Zine-Plated, Mounting Type - Cylindrical Stem Reinforced Polypropylene core, High-Quality Resilient Rubber Wheel Tread Bearing –Plain Bearing

Wheel surface: high-quality elastic rubber Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

Wheel Bearing

Standard

● Imperial ○ Metric

5 " Wheel Diameter

1-1/4 " Wheel Width Wheel With Plain Bearing

Diameter 7/8 "

2-1/4 " Stem Hole Spec 1-7/16 " Offset 7-13/16 " Swivel Interference 6-3/16 " Overall Height 3-15/16" Swivel Radius Hardness Of Tread 80±5° Shore A


Load Capacity (Dynamic) 198lbs 298lbs Load Capacity (Static) Temperature -4°F to +248°F

Fork Type **Swivel Caster** Stainless N/A **Electrical Conductivity** N/A Anti-Static N/A 2.6lbs Weight


Advantages at a glance

Rolling Resistance **Operating Noise** Floor Surface Preservation • • • • •

Dimensions

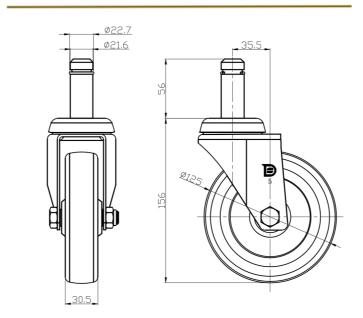

Mounting

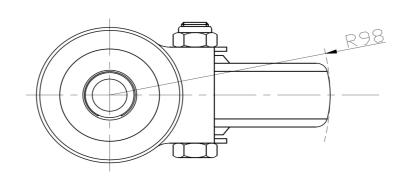

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.

ISO22883