1129 Medical Caster Series

Dersheng Casters Keep Rolling

PPR (Pearlescent dark gray) Wheel Diameter × Wheel Width 125 x 31mm

EAN


YJ-11290500067943

Swivel Caster with Riveted Stamping Fork—Ø21.6 x 56L Zine-Plated, Mounting Type - Cylindrical Stem High-Quality Impact-Resistant Polypropylene core, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread Pearl-finish dark gray, Bearing—Ball Bearing.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 125mm
Wheel Width 31mm

Wheel Bearing Wheel With Plain Bearing

Diameter21.6mmStem Hole Spec56mmOffset35.5mmSwivel Interference196mmOverall Height156mmSwivel Radius98mm

Hardness Of Tread 80±5° Shore A
Load Capacity (Dynamic) 110kgs
Load Capacity (Static) 165kgs

Temperature -20°C to +120°C
Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.88kgs

Standard ISO22883

Advantages at a glance

Rolling Resistance


• • • 0

Operating Noise


• • • 0

Floor Surface Preservation $\bullet \bullet \bullet \bullet \circ$

Dimensions



Mounting

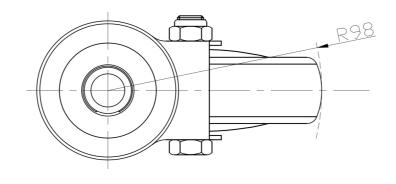

 $[\]boldsymbol{\ast}$ For any deviation between metric and imperial spec, please refer to the metric spec.