# 1129 Medical Caster Series

Dersheng Casters Keep Rolling

PPR (Pearlescent dark gray) Wheel Diameter × Wheel Width 125 x 31mm

EAN


YJ-11290500262023

Swivel castor, Top Plate Riveted Stamping Fork - medical hole Surface Zine-Plated, Mounting Type - Top Plate High-quality Impact Resistance Polypropylene Wheel Center, High-Quality Thermoplastic Rubber (TPR) Wheel Tread Pearl dark gray, Bearing - Ball Bearing.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

#### Technical Data

● Metric ○ Imperial

Wheel Diameter 125mm
Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 95 x 72.5mm

Bolt Hole Spacing 72.2 x 53.5mm

Plate Hole 10mm

Offset 35.6mm

Swivel Interference 201mm

Overall Height 162mm

Swivel Radius 100.5mm

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 110kgs

Load Capacity (Static) 165kgs

Temperature -20°C to +60°C
Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.85kgs

Standard ISO22883

### Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • •

#### **Dimensions**

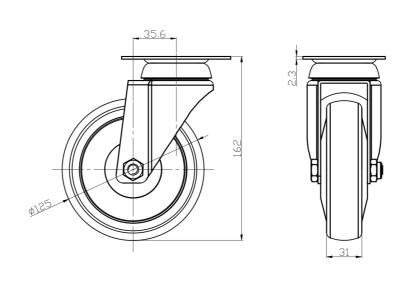

## Mounting

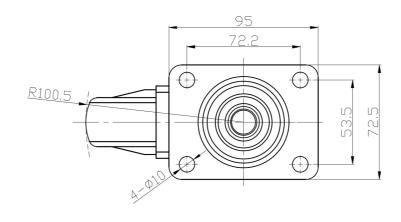

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.