1129 Medical Caster Series

Dersheng Casters Keep Rolling

PPR (Pearlescent dark gray) Wheel Diameter × Wheel Width 125 x 31mm

EAN


YJ-11290500265023

Swivel Caster, thread-Riveted Stamping Fork—M16-P2 Extended control lever surface, Mounting Type - Threaded Stem High-quality Impact Resistance Polypropylene Wheel Center, High-Quality Thermoplastic Rubber (TPR) Wheel Tread Pearl-colored dark gray, Bearing—Ball Bearing.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 5 "

Wheel Width 1-1/4 "

Wheel Bearing Wheels With Ball Bearings

Threaded Stem M16-P2

Threaded Size 1-3/16 "

Offset 1-7/16 "

Swivel Interference 10-3/8 "

Overall Height 6-1/2 "

Swivel Radius 3-15/16 "

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 243lbs

Load Capacity (Static) 364lbs

Temperature -4°F to +140°F

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A
Weight 1.7lbs
Standard ISO22883

Advantages at a glance


Rolling Resistance


Operating Noise

• • • • 0

Floor Surface Preservation • • • • •

Dimensions

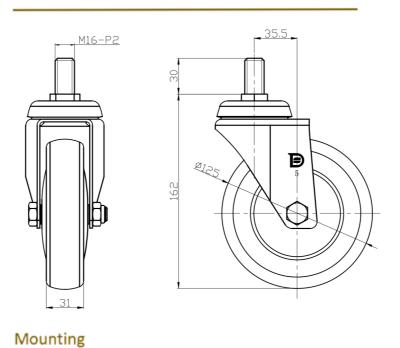

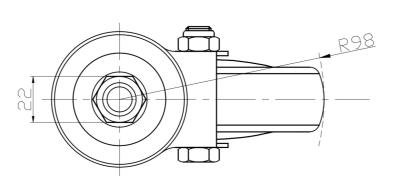

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.