1129 Medical Caster Series

AQPU (grey round) Wheel Diameter × Wheel Width 125 x 31mm

EAN


YJ-11290500605036

Swivel Caster with thread-Riveted Stamping Fork—M16-P2 Chrome-Plated finish, Mounting Type - Threaded Stem Aluminum core, High Quality Polyurethane Wheel Tread Gray, Bearing—Ball Bearing.

Wheel tread: Made of high-quality polyurethane

Wheel Center: aluminum core

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 150mm
Wheel Width 40mm

Wheel Bearing Wheels With Ball Bearings

Threaded Stem M16-P2
Threaded Size 30mm
Offset 35.5mm
Swivel Interference 196mm
Overall Height 157mm
Swivel Radius 98mm

Hardness Of Tread 77±5° Shore A
Load Capacity (Dynamic) 230kgs
Load Capacity (Static) 345kgs

Temperature -20°C to +70°C

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Electrical Conductivity

Anti-Static

N/A

Weight

1.02kgs

Standard

ISO22883


Advantages at a glance

Rolling Resistance


• • • • •

Floor Surface Preservation • • • • •

Dimensions

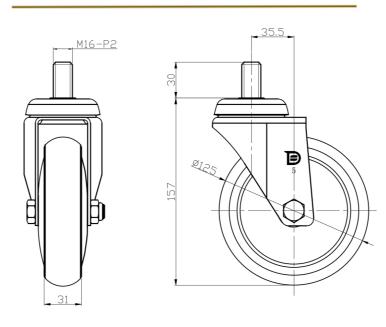

Mounting

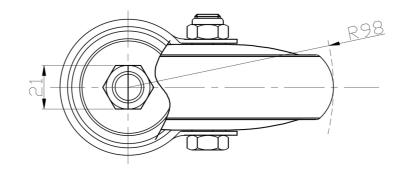

 $[\]boldsymbol{\ast}$ For any deviation between metric and imperial spec, please refer to the metric spec.