# 1139-1 Series — Medium Duty General Purposes Caster (American Style)

Dersheng Casters Keep Rolling

PPP (White) Wheel Diameter × Wheel Width 63.5 × 32 mm


EAN

YJ-11390250292013

Swivel Caster with Riveted Fork and Stamping Fork—75 x 45 mm (3" x 1-3/4") Bolt Hole Spacing Zine-Plated, Mounting Type - Top Plate Polypropylene Wheel Center and Wheel Tread White, Bearing—Ball Bearings.

Tread:Polypropylene
Wheel Center:Polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

#### Technical Data

● Metric ○ Imperial

Wheel Diameter 63.5mm
Wheel Width 32mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 93 x 61mm

Bolt Hole Spacing 73.5 x 45mm

Plate Hole 12.9 x 9.5mm

Offset 30mm

Swivel Interference 124mm

Overall Height 93.5mm

Swivel Radius 62mm

Hardness Of Tread 65±5° Shore D

Load Capacity (Dynamic) 80kgs

Load Capacity (Static) 120kgs

Temperature -10°C to +60°C
Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.53kgs

Standard ISO22883

### Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • • •

#### **Dimensions**

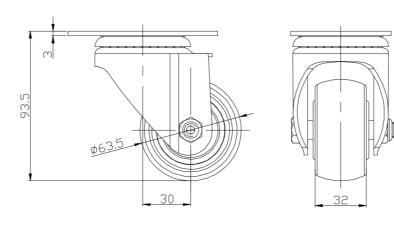

## Mounting

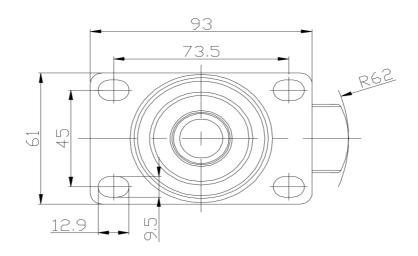

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.