

1139-1 Series — Medium Duty General Purposes Caster (American Style)



PPP (white) Wheel Diameter × Wheel Width 75.5 × 31.5 mm


EAN

YJ-11390300294073

Casters with Total Brakes and a With locking system. Top Plate with Riveted, Stamping Fork and 75 x 45 mm (3" x 1-3/4") Bolt Hole Spacing. Zine-Plated, Mounting Type - Top Plate. Polypropylene Wheel Center and Wheel Tread. White, Bearing with Ball Bearings.

Tread:Polypropylene
Wheel Center:Polypropylene

Drawings are for reference only and may differ from the product

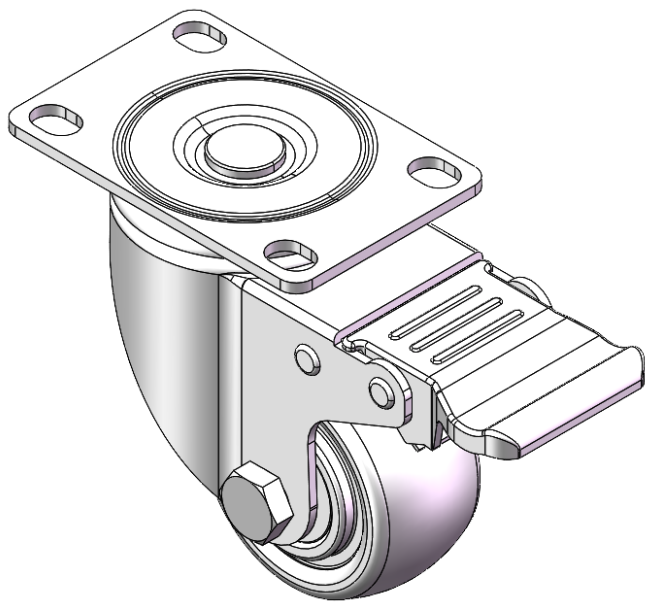

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter	75.5mm
Wheel Width	31.5mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	93 x 61mm
Bolt Hole Spacing	73.5 x 45mm
Plate Hole	12.9 x 9.5mm
Offset	30mm
Swivel Interference	213mm
Overall Height	106mm
Swivel Radius	106.5mm
Hardness Of Tread	65±5° Shore D
Load Capacity (Dynamic)	100kgs
Load Capacity (Static)	150kgs
Temperature	-10°C to +60°C
Fork Type	Swivel Caster With Total Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.68kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ○ ○
Floor Surface Preservation	● ● ● ○ ○

Dimensions

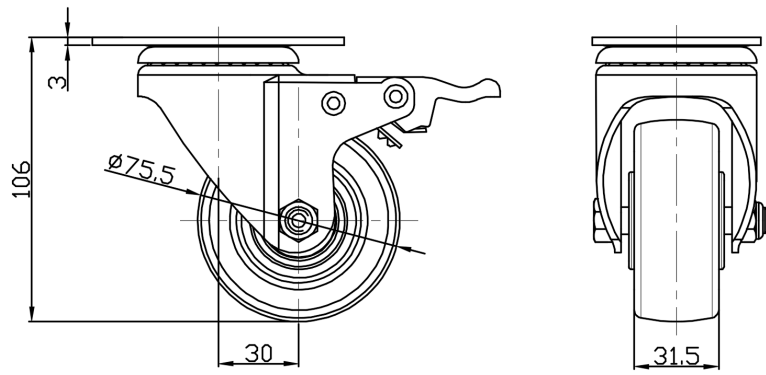

Mounting

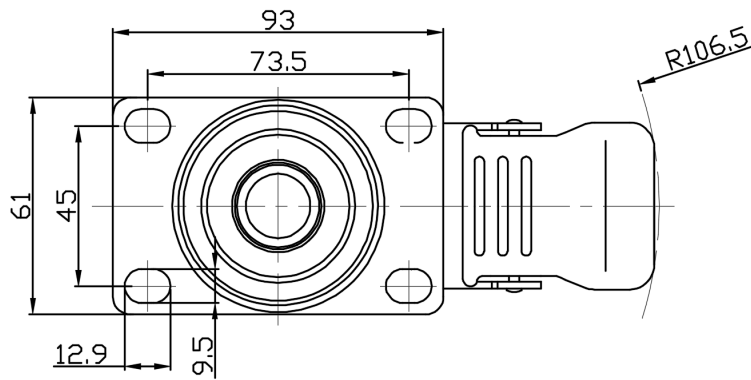

* For any deviation between metric and imperial spec, please refer to the metric spec.