1139 Medium Duty General Purposes Caster Series

Dersheng Casters Keep Rolling

W Resolute (Pearlescent dark gray) Wheel Diameter × Wheel Width 75 x 31mm

EAN


YJ-11390300455013

Swivel Caster, thread-Riveted Stamping Fork—M12-P1.75
Zine-Plated, Mounting Type - Threaded Stem
Reinforced impact-resistant polypropylene core, High-Quality Reinforced Polypropylene
Rubber (TPR) Wheel Tread
Pearl-gray finish, Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 3 "

Wheel Width 1-1/4 "

Wheel Bearing Wheels With Ball Bearings

Threaded Stem M12-P1.75

Threaded Size 1"

Offset 1-1/2"

Swivel Interference 6"

Overall Height 4-3/16"

Swivel Radius 3"

Hardness Of Tread 72±5° Shore A
Load Capacity (Dynamic) 243lbs

Load Capacity (Static) 364lbs

Temperature -4°F to +140°F
Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.1lbs

Standard ISO22883

Advantages at a glance

Rolling Resistance


• • • • •

Operating Noise


• • •

Floor Surface Preservation • • • • •

Dimensions

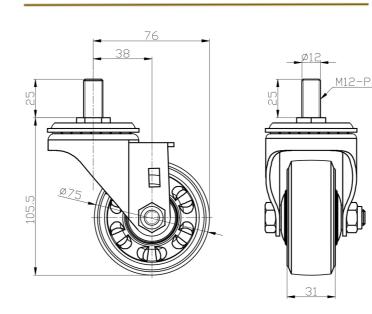

Mounting

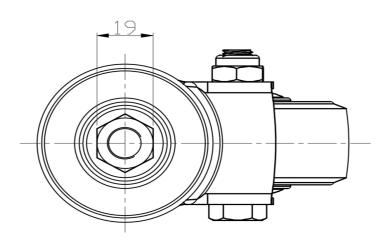

 $[\]boldsymbol{\ast}$ For any deviation between metric and imperial spec, please refer to the metric spec.