1139 Medium Duty General Purposes Caster Series



Resolute (Gray deep gray) Wheel Diameter x Wheel Width 75 x 31mm

EAN

YJ-11390300455014

Swivel Caster, thread Riveted Stamping Fork - M12-P1.75 Surface electroplating, Threaded Stem installation device High-quality Impact Resistance Polypropylene Wheel Center, High-Quality Thermoplastic Rubber (TPR) wheel tread Gray-dark grey, Bearing – Ball Bearing.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 3 "

Wheel Width 1-1/4 "

Wheel Bearing Wheels With Ball Bearings

Threaded Stem M12-P1.75

Threaded Size 13/16 "

Offset 1-1/2 "

Swivel Interference 6 "

Overall Height 4-3/16 "

Swivel Radius 3 "

Hardness Of Tread 72±5° Shore A
Load Capacity (Dynamic) 198lbs

Load Capacity (Static) 298lbs

Temperature -4°F to +140°F

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A
Weight 1.2lbs
Standard ISO22883

Advantages at a glance

Rolling Resistance


• • • •

Operating Noise


• • • •

Floor Surface Preservation • • • • •

Dimensions

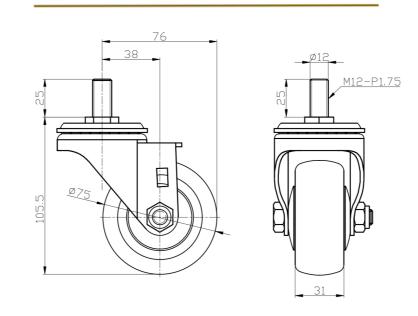

Mounting

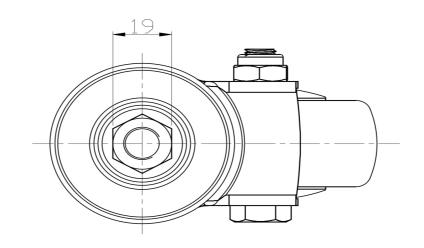

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.