## 1139 Medium Duty General Purposes Caster Series

Dersheng Casters Keep Rolling

QPU (Brown flat) Wheel Diameter x Wheel Width 75 × 32mm

EAN


YJ-11390300535013

Swivel Caster, thread-Riveted Stamping Fork—M12-P1.75 Zine-Plated, Mounting Type - Threaded Stem Cast Iron core, High Quality Polyurethane Wheel Tread Brown, Bearing—Ball Bearing.

Wheel tread: Made of high-quality polyurethane

Wheel Center: cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

## Technical Data

● Metric ○ Imperial

Wheel Diameter 75mm
Wheel Width 32mm

Wheel Bearing Wheels With Ball Bearings

Threaded Stem M12-P1.75

Threaded Size 25mm

Offset 38mm

Swivel Interference 156mm

Overall Height 105.5mm

Swivel Radius 78mm

Hardness Of Tread 92±5° Shore A
Load Capacity (Dynamic) 160kgs
Load Capacity (Static) 240kgs

Temperature -20°C to +70°C

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity

Anti-Static

Weight

N/A

0.94kgs

Standard

ISO22883


## Advantages at a glance

Rolling Resistance


Operating Noise • •

Floor Surface Preservation • • • • •

## Dimensions

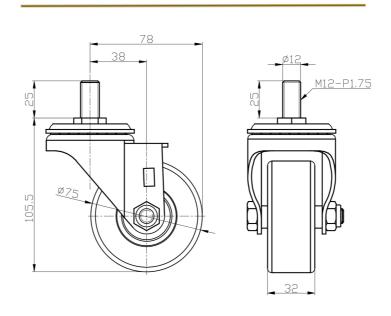

Mounting

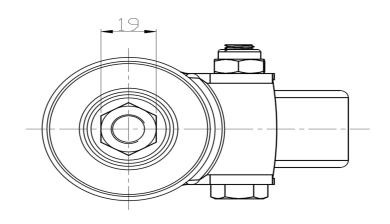

 $<sup>\</sup>boldsymbol{\ast}$  For any deviation between metric and imperial spec, please refer to the metric spec.