

Product Data Sheet

1139 Medium Duty General Purposes Caster Series



Rubber Wheel Diameter × Wheel Width 100 x 30.5mm


EAN

YJ-11390400065223

Swivel Caster, thread-Riveted Stamping Fork - 1/2"-13"
Zine-Plated, expansion Mounting Type (Ø21.6-Ø24)
Reinforced Polypropylene core, High-Quality Resilient Rubber Wheel Tread
Bearing - Plain Bearing

Wheel surface: high-quality elastic rubber
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

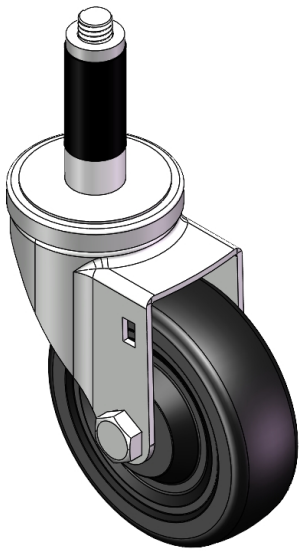

Picture may differ from original product


Technical Data

☒ Imperial ☐ Metric	
Wheel Diameter	4 "
Wheel Width	1-1/4 "
Wheel Bearing	Wheel With Plain Bearing
Expandable Stem	7/8 " x 2-3/4 "
Offset	1-1/2 "
Swivel Interference	176mm
Overall Height	5 "
Swivel Radius	2-7/16 "
Hardness Of Tread	80±5° Shore A
Load Capacity (Dynamic)	176lbs
Load Capacity (Static)	265lbs
Temperature	-4°F to +248°F
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	2.0lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

Dimensions

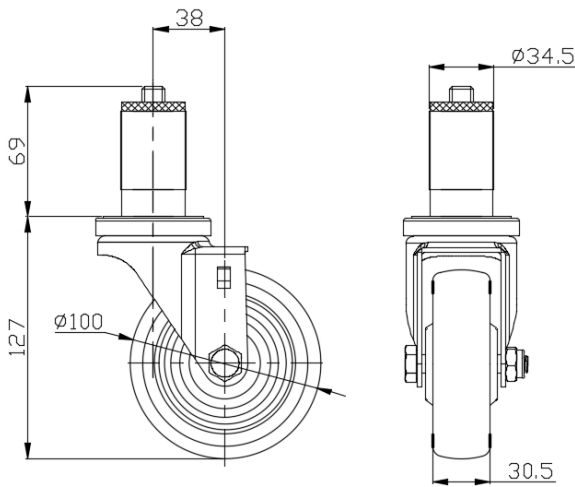

Mounting

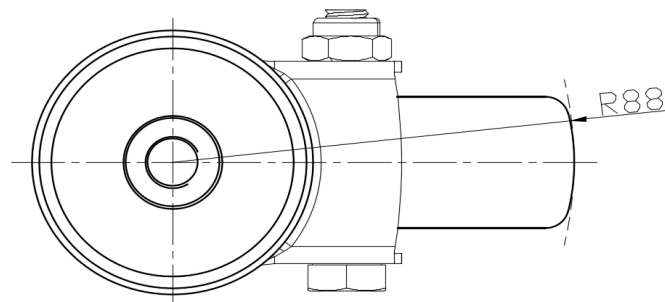

* For any deviation between metric and imperial spec, please refer to the metric spec.