

1139-1 Series — Medium Duty General Purposes Caster  
(American Style)



PPP (white) Wheel Diameter × Wheel Width 100 × 30.5 mm


EAN

YJ-11390400292033

Swivel Caster with Riveted Fork and Stamping Fork – 75 x 45 mm (3" x 1-3/4") Bolt Hole Spacing  
Zine-Plated, Mounting Type - Top Plate  
Polypropylene Wheel Center and Wheel Tread  
White, Bearing – Ball Bearings.

Tread:Polypropylene  
Wheel Center:Polypropylene

Drawings are for reference only and may differ from the product

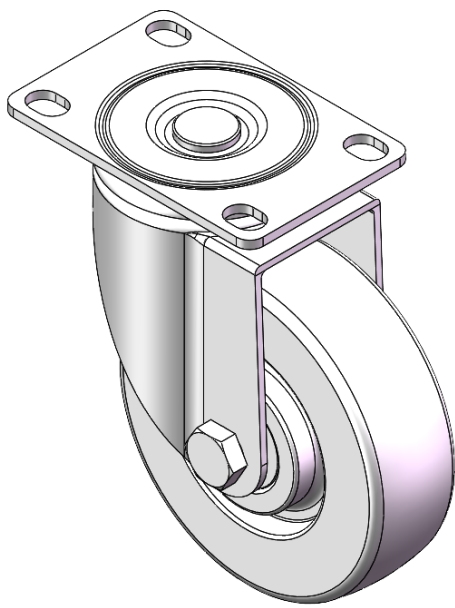

Picture may differ from original product


Technical Data

|                                                                        |                           |
|------------------------------------------------------------------------|---------------------------|
| <input checked="" type="radio"/> Imperial <input type="radio"/> Metric |                           |
| Wheel Diameter                                                         | 4 "                       |
| Wheel Width                                                            | 1-1/4 "                   |
| Wheel Bearing                                                          | Wheels With Ball Bearings |
| Plate Size                                                             | 3-11/16 " x 2-7/16 "      |
| Bolt Hole Spacing                                                      | 2-15/16 " x 1-13/16 "     |
| Plate Hole                                                             | 9/16 " x 3/8 "            |
| Offset                                                                 | 1-3/16 "                  |
| Swivel Interference                                                    | 6-3/8 "                   |
| Overall Height                                                         | 5-1/16 "                  |
| Swivel Radius                                                          | 3-3/16 "                  |
| Hardness Of Tread                                                      | 65±5° Shore D             |
| Load Capacity (Dynamic)                                                | 265lbs                    |
| Load Capacity (Static)                                                 | 397lbs                    |
| Temperature                                                            | 14°F to +140°F            |
| Fork Type                                                              | Swivel Caster             |
| Stainless                                                              | N/A                       |
| Electrical Conductivity                                                | N/A                       |
| Anti-Static                                                            | N/A                       |
| Weight                                                                 | 1.0lbs                    |
| Standard                                                               | ISO22883                  |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ○ ○ |
| Floor Surface Preservation | ● ● ● ○ ○ |

Dimensions

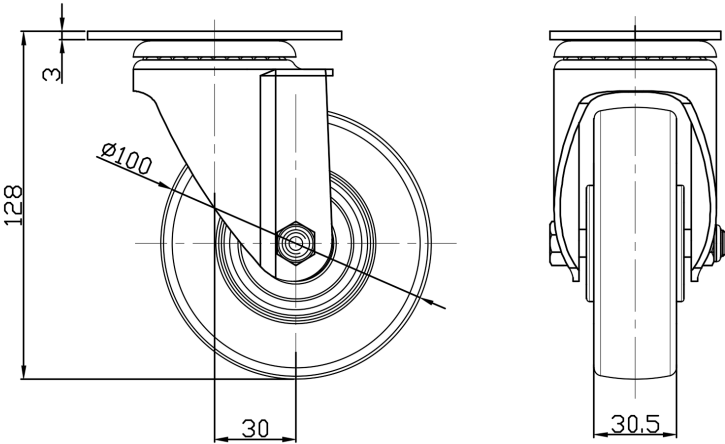

Mounting

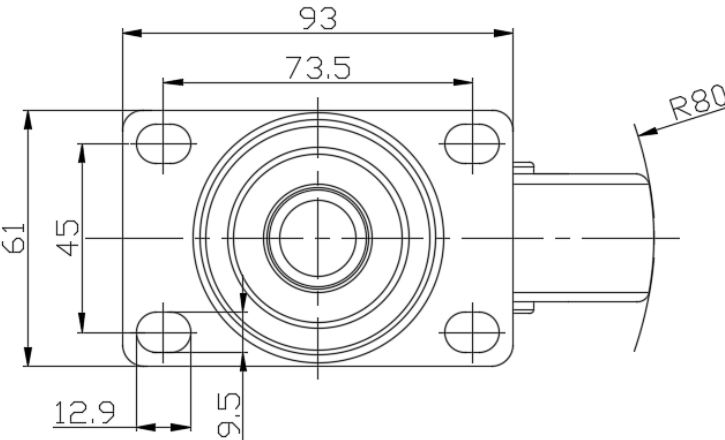

\* For any deviation between metric and imperial spec, please refer to the metric spec.