1139 Medium Duty General Purposes Caster Series



WPP (Black, Round) Wheel Diameter × Wheel Width 100 x 31mm


EAN

YJ-11390400292083

Swivel Caster, Top Plate Riveted Stamping Fork - high-grade hole Surface Zine-Plated, Top Plate type (4T) Mounting Type device Polypropylene Wheel Center, Wheel Tread Black, Bearing - Ball Bearing.

Wheel Tread: PP polypropylene Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 4 "

Wheel Width 1-1/4 "

Wheel Bearing Wheels With Ball Bearings

Plate Size 3-13/16 " x 2-9/16 "

Bolt Hole Spacing 3 " x 1-13/16 "

Plate Hole 1/2 " x 23/64 "

Offset 1-1/2 "

Swivel Interference 7 "

Overall Height 5-3/16 "

Swivel Radius 3-1/2 "

Hardness Of Tread 65±5° Shore D
Load Capacity (Dynamic) 287lbs

Load Capacity (Static) 237lbs

Load Capacity (Static) 430lbs

Temperature 14°F to +140°F

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.7lbs

Standard ISO22883

Advantages at a glance

Rolling Resistance


••••

Operating Noise


 \bullet \bullet \circ \circ

Floor Surface Preservation $\bullet \bullet \circ \circ$

Dimensions

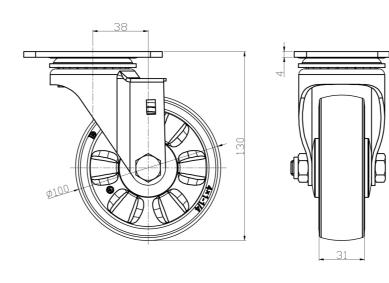

Mounting

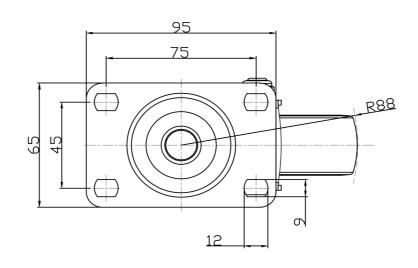

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.