1139 Medium Duty General Purposes Caster Series



AQPU (brown round) Wheel Diameter × Wheel Width 125 x 31mm

EAN

YJ-11390500601033

Rigid Caster with Stamping Fabricated Caster Fork and 75 x 45 mm (3" x 1-3/4") Bolt Hole Spacing.

Zine-Plated, Mounting Type - Top Plate.


Aluminum core, High Quality Polyurethane Wheel Tread.

Brown color, Bearing—Ball Bearings.

Wheel tread: Made of high-quality polyurethane

Wheel Center: aluminum core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

Metric	\bigcirc	Imperial

Wheel Diameter 125mm
Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 92 x 62mm

Bolt Hole Spacing 75 x 45mm

Plate Hole 12 x 9mm

Overall Height 158mm

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 230kgs

Load Capacity (Static) 345kgs

Load Capacity (Static)

Temperature

-20°C to +70°C

Fork Type

Rigid Caster

Stainless

N/A

StainlessN/AElectrical ConductivityN/AAnti-StaticN/AWeight0.75kgsStandardISO22883


Advantages at a glance


Rolling Resistance

Operating Noise • • • •


Floor Surface Preservation • • • • •

Dimensions





Mounting

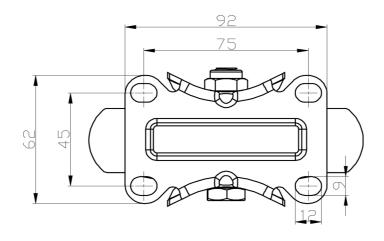

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.