1151D Heavy Duty 1.5" Wide General Purposes Caster Series



QPU (Brown round) Wheel Diameter × Wheel Width 100 x 34mm

EAN


YJ-11510400532043

Swivel Caster with Riveted Fork and Stamping Fork - 85 x 70mm (3-3/8" x 2-3/4") Bolt Hole Spacing Zine-Plated, Fork-mounted (4T) Mounting Type system Cast Iron Wheel Center, High Quality Polyurethane tread Brown, Bearing - Ball Bearing.

Wheel tread: Made of high-quality polyurethane

Wheel Center: cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

Swivel Radius

● Imperial ○ Metric

Wheel Diameter 4 "

Wheel Width 1-3/8 "

Wheel Bearing Wheels With Ball Bearings

3-9/16 "

Plate Size 4-9/16 " x 4-3/16 "

Bolt Hole Spacing 3-7/16 " x 2-13/16 "

Plate Hole 13/16 " x 3/8 "

Offset 1-5/8 "

Swivel Interference 7-1/8 "

Overall Height 5-3/16 "

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 661lbs

Load Capacity (Static) 992lbs

Temperature -4°F to +158°F

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 3.5lbs

Standard ISO22883


Advantages at a glance


Rolling Resistance

Operating Noise • • • •


Floor Surface Preservation • • • • •

Dimensions





Mounting

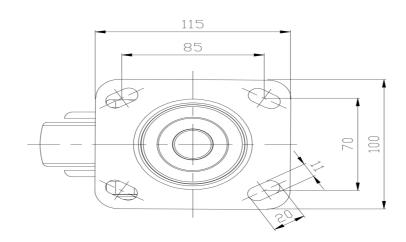

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.