1151D Heavy Duty 1.5" Wide General Purposes Caster Series



AQPU (grey round) Wheel Diameter × Wheel Width 125 x 40mm

EAN


YJ-11510500601023

Rigid castor, Stamping Fabricated Caster Fork - 75 x 45 mm (3" x 1-3/4") Bolt Hole Spacing Surface Zine-Plated, Top Plate Mounting Type Aluminum core, High Quality Polyurethane Wheel Tread Grey, Bearing - Ball Bearing.

Wheel tread: Made of high quality polyurethane

Wheel Center: Aluminum core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 5 "

Wheel Width 1-5/8 "

Wheel Bearing

Wheels With Ball Bearings

Plate Size

4-11/16 " x 3-13/16 "

Bolt Hole Spacing 3-3/8 " x 2-3/4 "
Plate Hole 13/16 " x 3/8 "

Overall Height 6-1/8 "

Hardness Of Tread 77±5° Shore A

Load Capacity (Dynamic) 507lbs

Load Capacity (Static) 761lbs

Temperature -4°F to +158°F

Fork Type Rigid Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A
Weight 2.7lbs
Standard ISO22883

Advantages at a glance


Rolling Resistance

• • • • •


Operating Noise

Floor Surface Preservation • • • • •

Dimensions

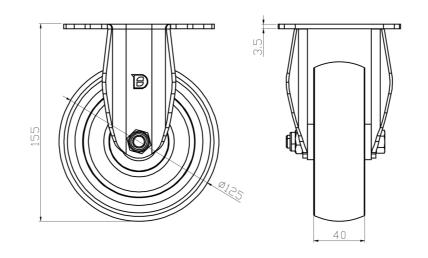

Mounting

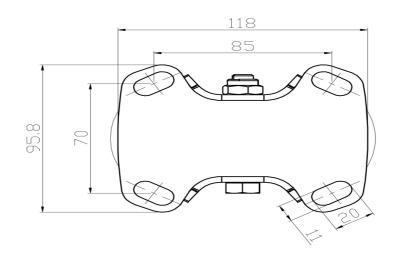

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.