

1151 51 European Standard Base Plate Series

AQPU Wheel (Brown Arc) Diameter x Width 125x40mm


A

YJ-11510500602033

Swivel Casters, Riveted and Stamping Top Plate brackets—44.5 x 30mm (1-3/4" x 1-1/8") Bolt Hole Spacings
 Zinc-Plated surface, Top Plate type (4T) Mounting Type device
 Aluminum core, High Quality Polyurethane Wheel Tread
 Gray, Bearing—Ball Bearings.

Wheel Tread: High-Quality Polyurethane
 Wheel Center: Aluminum core

Drawings are for reference only and may differ from the product

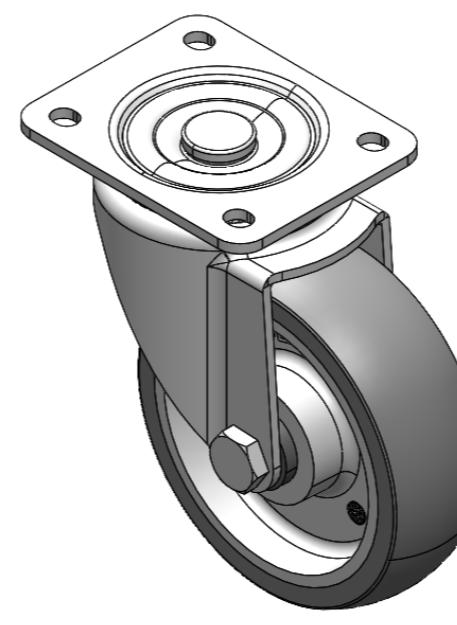

Picture may differ from original product

Technical Data


Imperial Metric

Wheel Diameter	5 "
Wheel Width	1-5/8 "
Wheel Bearing	Wheels With Ball Bearings
Plate Size	4-3/16 " x 3-7/16 "
Bolt Hole Spacing	3-3/16 " x 2-7/16 "
Plate Hole	3/8 " x 23/64 "
Offset	1-5/8 "
Swivel Interference	8-1/8 "
Overall Height	6-1/8 "
Swivel Radius	4-1/16 "
Hardness Of Tread	92±5° Shore A
Load Capacity (Dynamic)	507lbs
Load Capacity (Static)	761lbs
Temperature	-4°F to +158°F
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	3.3lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • • •
Floor Surface Preservation	• • • •

Dimensions

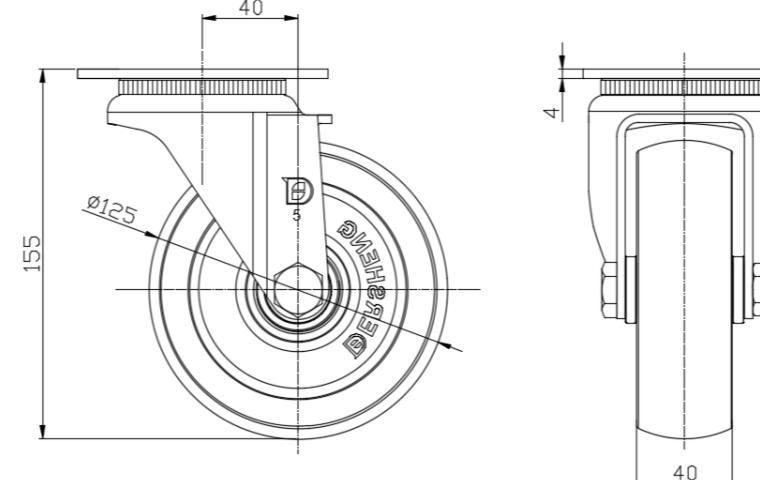

Mounting

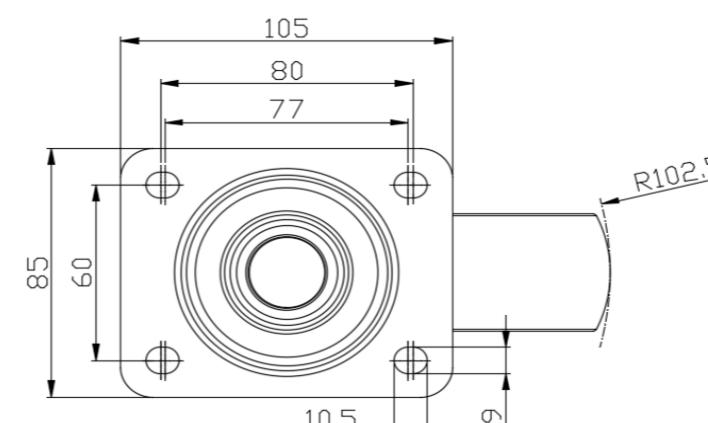

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com