


1168 Levelling Caster Series

MRC (black) Wheel Diameter x Wheel Width 75 x 45 mm

EAN

YJ-11680300052053

Swivel Caster with Riveted Fork and Stamping bracket—European standard holes Zinc-Plated, Mounting Type - Top Plate Reinforced Polypropylene and tread Black, Bearing—Ball Bearing.

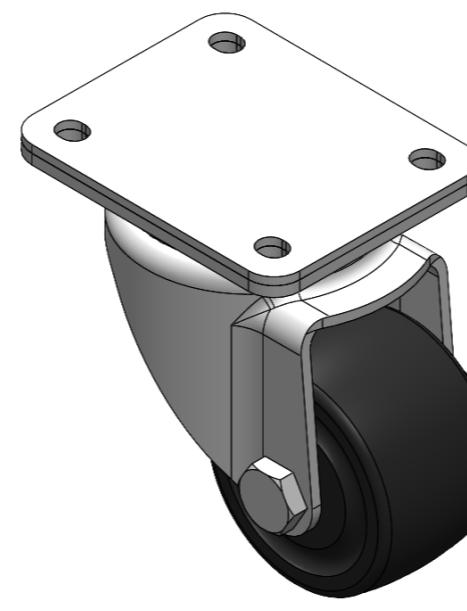

Wheel Tread: Thermoplastic (PA6)
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data


Metric Imperial

Wheel Diameter	75mm
Wheel Width	45mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	105 x 85mm
Bolt Hole Spacing	80 x 60mm
Plate Hole	10.5 x 9mm
Offset	40mm
Swivel Interference	156mm
Overall Height	120mm
Swivel Radius	78mm
Hardness Of Tread	75±5° Shore D
Load Capacity (Dynamic)	300kgs
Load Capacity (Static)	450kgs
Temperature	-20°C to +80°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	1.27kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • o o o
Floor Surface Preservation	• • o o o

Dimensions

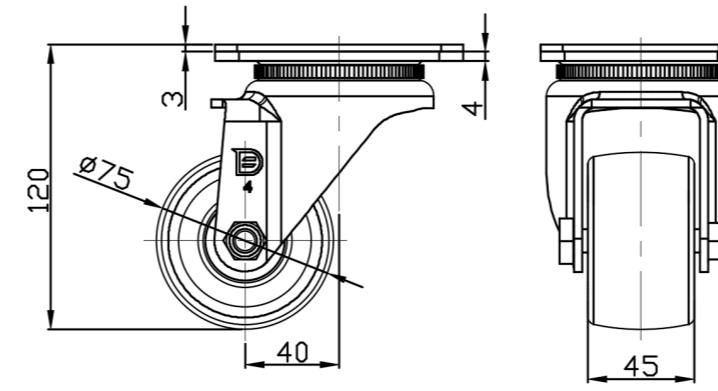

Mounting

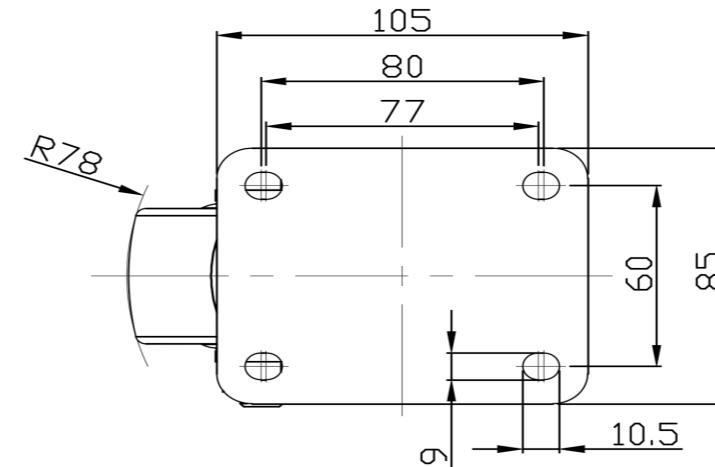

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com