


## 1168 Levelling Caster Series

AQPU (brown round) Wheel Diameter x Wheel Width 100 x 40mm

EAN

YJ-11680400601013

Rigid castor, Stamping Fabricated Caster Fork - European standard hole Extended control lever surface, Mounting Type - Top Plate Aluminum Wheel Center, High Quality Polyurethane Wheel Tread Brown, Bearing - Ball Bearing.

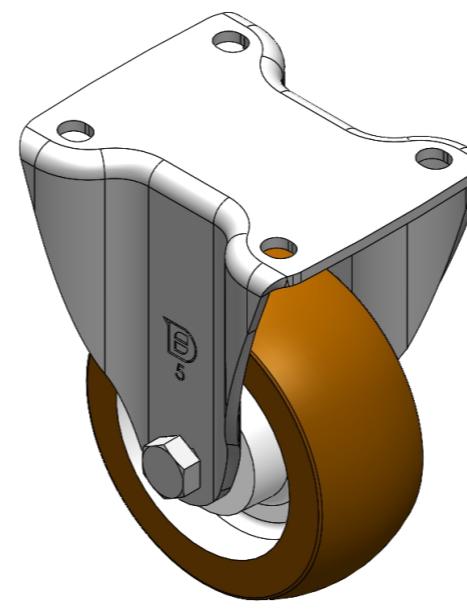

Wheel Tread: High quality polyurethane  
Wheel Center: Aluminum core

Drawings are for reference only and may differ from the product

Picture may differ from original product

## Technical Data

Imperial  Metric

Wheel Diameter

4 "

Wheel Width

1-5/8 "

Wheel Bearing

Wheels With Ball Bearings

Plate Size

4-3/16 " x 3-1/2 "

Bolt Hole Spacing

3-3/16 " x 2-7/16 "

Plate Hole

3/8 " x 23/64 "

Overall Height

5-11/16 "

Hardness Of Tread

92±5° Shore A

Load Capacity (Dynamic)

705lbs

Load Capacity (Static)

1058lbs

Temperature

-4°F to +158°F

Fork Type

Rigid Caster

Stainless

N/A

Electrical Conductivity

N/A

Anti-Static

N/A

Weight

2.3lbs

Standard

ISO22883

## Advantages at a glance

Rolling Resistance




Operating Noise




Floor Surface Preservation



## Dimensions

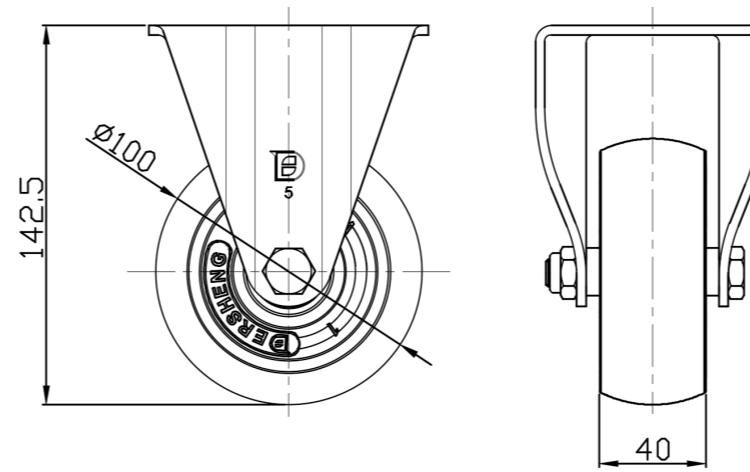

## Mounting

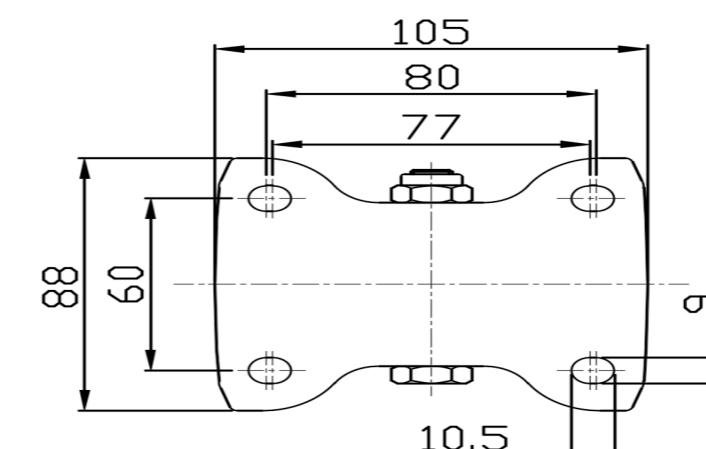

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com