

## 1168 Levelling Caster Series

AQPU (brown round) Wheel Diameter x Wheel Width 100 x 40mm

EAN


YJ-11680400602023

Height Adjustable Leveling Caster, Top Plate Riveted and Stamping with European standard holes, Short Pedal Zinc-Plated, Mounting Type - Top Plate, Height Adjustable Stand Aluminum Wheel Center, High Quality Polyurethane tread Brown, Bearing—Ball Bearing.

Wheel Tread: high quality polyurethane

Wheel Center: aluminum core

Drawings are for reference only and may differ from the product

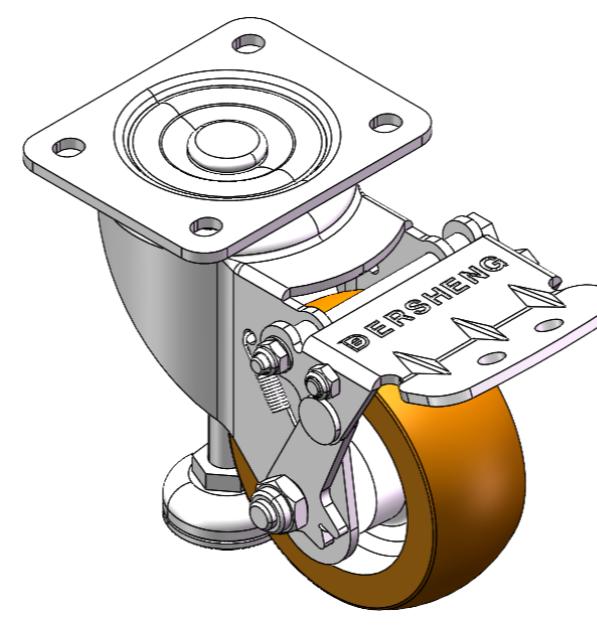

Picture may differ from original product

## Technical Data


 Metric  Imperial

Wheel Diameter	100mm
Wheel Width	40mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	105 x 85mm
Bolt Hole Spacing	80 x 60mm
Plate Hole	10.5 x 9mm
Offset	65mm
Swivel Interference	270mm
Overall Height	142.5mm
Swivel Radius	135mm
Hardness Of Tread	92±5° Shore A
Load Capacity (Dynamic)	320kgs
Load Capacity (Static)	1000kgs
Temperature	-20°C to +70°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	2.25kgs
Standard	ISO22883


## Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • • •
Floor Surface Preservation	• • • •

## Dimensions

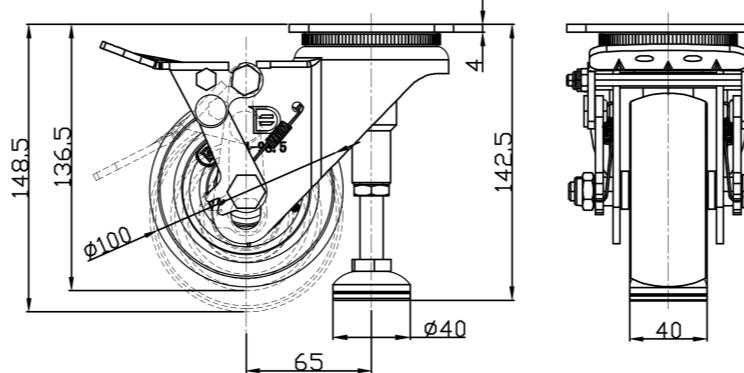

## Mounting

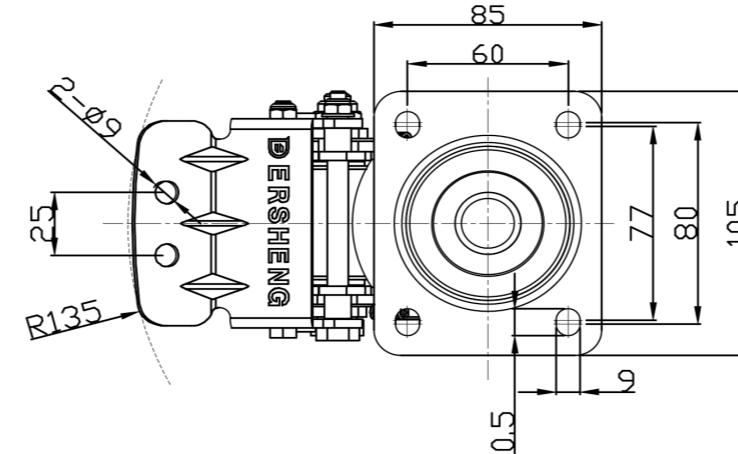

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com