


1168 Levelling Caster Series

AQPU (brown round) Wheel Diameter x Wheel Width 100 x 40mm

EAN

YJ-11680400602083

Swivel Caster with Riveted Fork and Stamping Fork with D-shaped hole. Zinc-Plated, Fork-mounted Mounting Type with Height Adjustable Stand. Aluminum Wheel Center with High Quality Polyurethane tread. Brown color, Bearing with Ball Bearing.

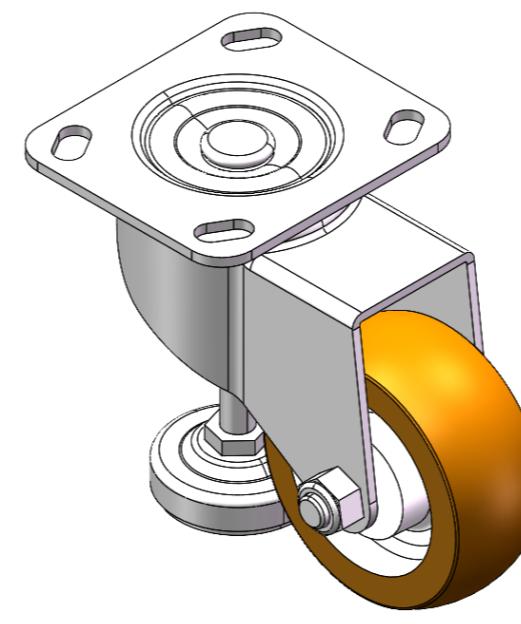

Picture may differ from original product

Wheel Tread: high quality polyurethane
Wheel Center: aluminum core

Drawings are for reference only and may differ from the product

Technical Data

Imperial Metric

Wheel Diameter 4 "

Wheel Width 1-7/16 "

Wheel Bearing Wheels With Ball Bearings

Plate Size 4-9/16 " x 4 "

Bolt Hole Spacing 3-3/8 " x 2-3/4 "

Plate Hole 13/16 " x 3/8 "

Offset 3-1/16 "

Swivel Interference 10 "

Overall Height 5-11/16 "

Swivel Radius 5 "

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 551lbs

Load Capacity (Static) 2205lbs

Temperature -4°F to +158°F

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 4.3lbs

Standard ISO22883


Advantages at a glance

Rolling Resistance • • • •


Operating Noise • • • •

Floor Surface Preservation • • • •

Dimensions

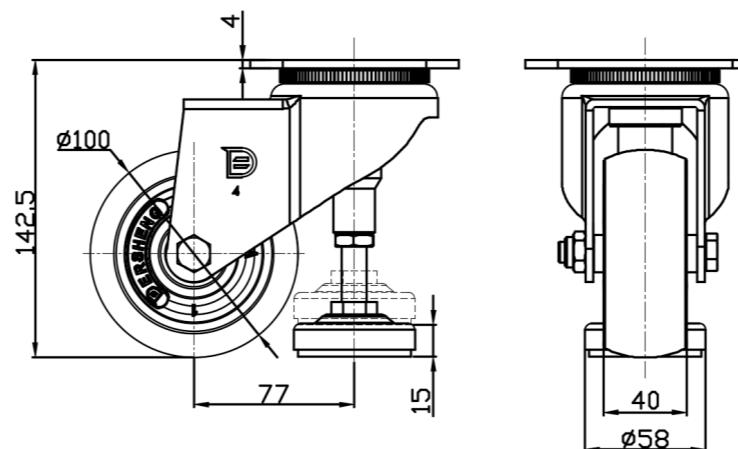

Mounting

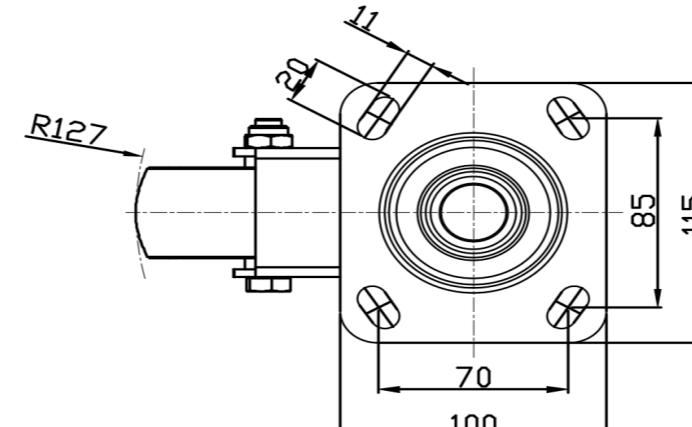

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com