

## 1169- Height Adjustment Caster

PA wheel (Black) Wheel Diameter x Wheel Width 40 x 20mm


EAN

YJ-11690150072021

Adjustable Caster with Riveted die-cast Top Plate - 49 x 49 Bolt Hole Spacing  
 Gray paint finish, Top Plate (3T) Mounting Type mechanism, adjustable Fork  
 Reinforced Polypropylene Wheel Center and Wheel Tread  
 Black, Bearing - Ball Bearings.

Wheel tread: Thermoplastic  
 Wheel Center: Thermoplastic

Drawings are for reference only and may differ from the product

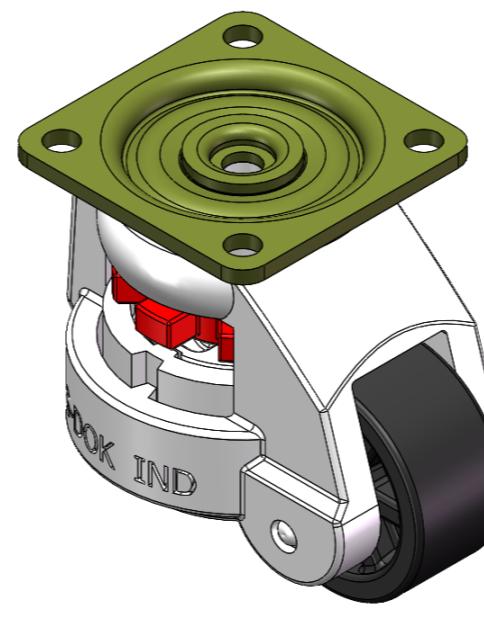

Picture may differ from original product

## Technical Data


Metric  Imperial

Wheel Diameter	40mm
Wheel Width	20mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	63 x 63mm
Bolt Hole Spacing	49 x 49mm
Plate Hole	6.5mm
Offset	30mm
Swivel Interference	102mm
Overall Height	71mm
Swivel Radius	51mm
Hardness Of Tread	75±5° Shore D
Load Capacity (Dynamic)	50kgs
Load Capacity (Static)	75kgs
Temperature	-20°C to +80°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.37kgs
Standard	ISO22883


## Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • o o o
Floor Surface Preservation	• • o o o

## Dimensions

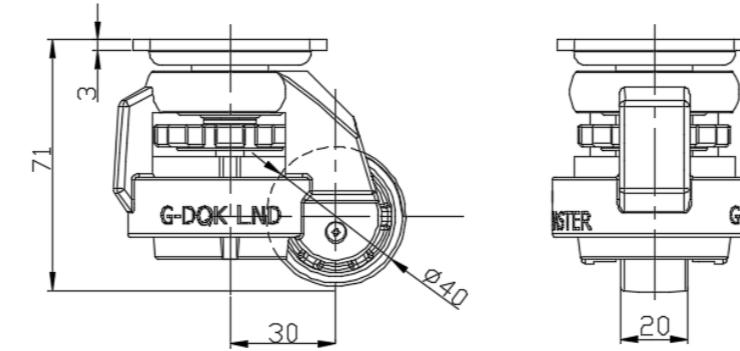

## Mounting

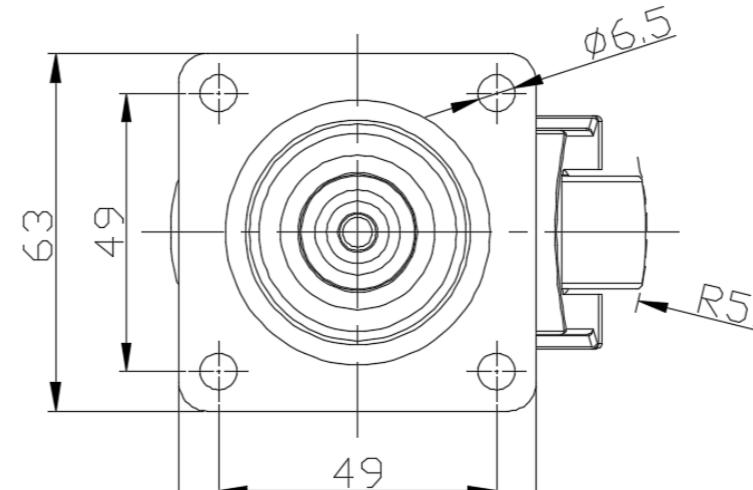

Drawings are for reference only and may differ from the product.

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com